


Plastic chambers and rings shall comply with BS EN 13598 -1 and BS EN 13598 - or have equivalent independent approval

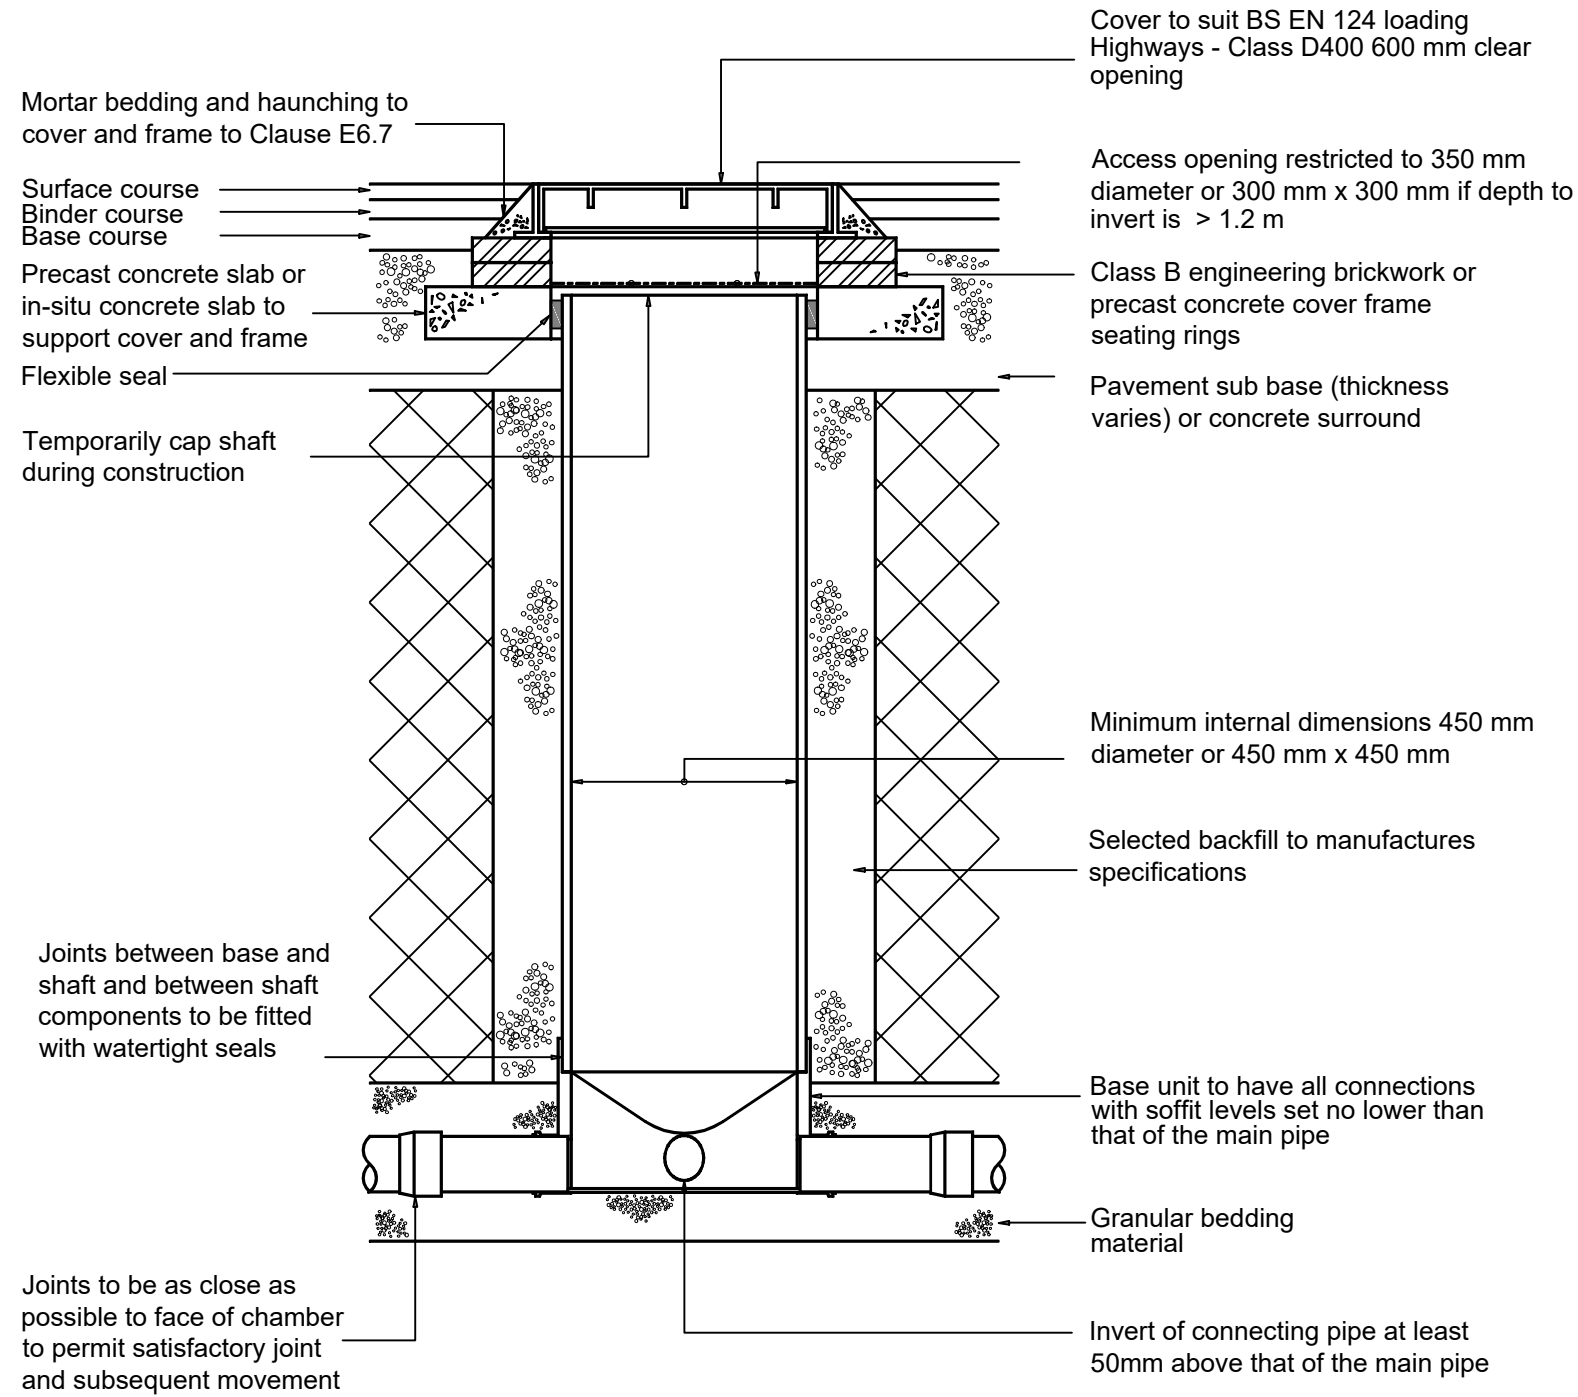


Note: Where the access chamber is in the highway the Highway Authority can gave specific requirements

Typical Inspection Chamber Detail - Private
Maximum depth from cover level to soffit of pipe in areas subject to vehicle loading 3 m, non-entry



Not to scale

Plastic chambers and rings shall comply with BS EN 13598-1 and BS EN 13598-2 or have equivalent independent approval

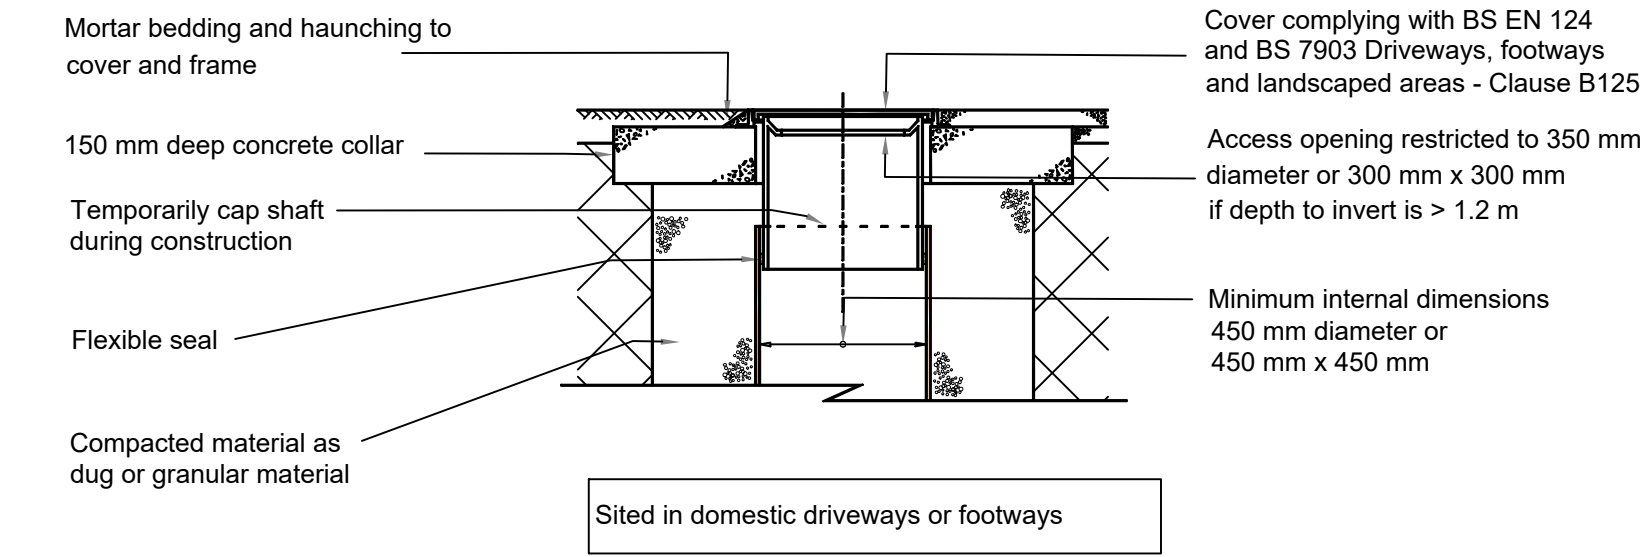


Alternative Top Details for Light Vehicle Loading
Landscaped Areas - Private

Not to scale

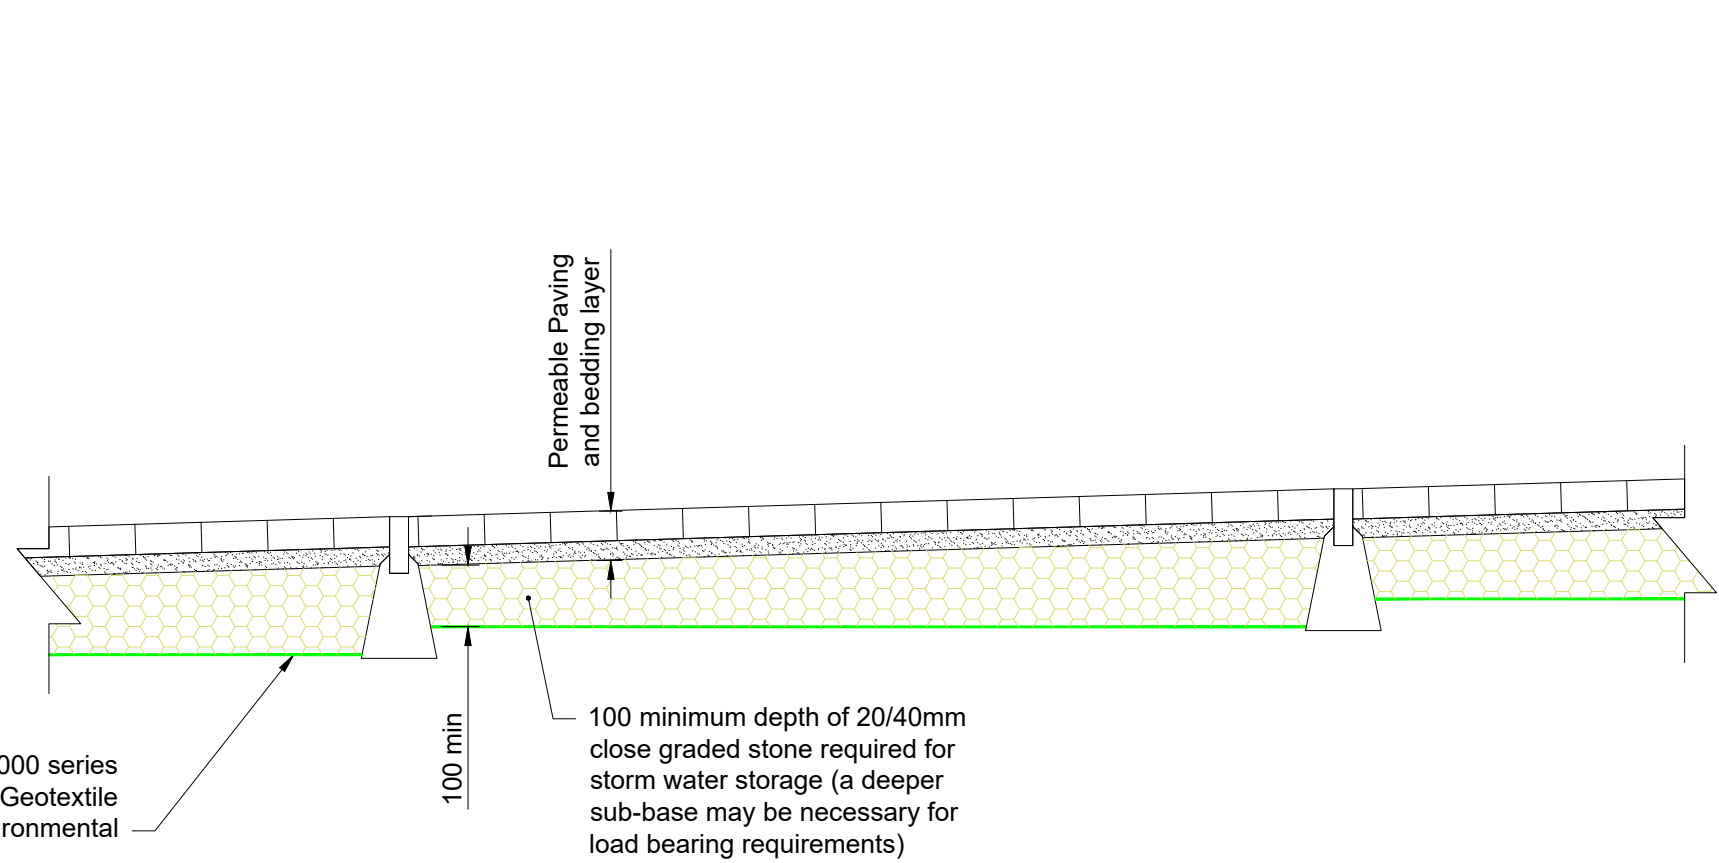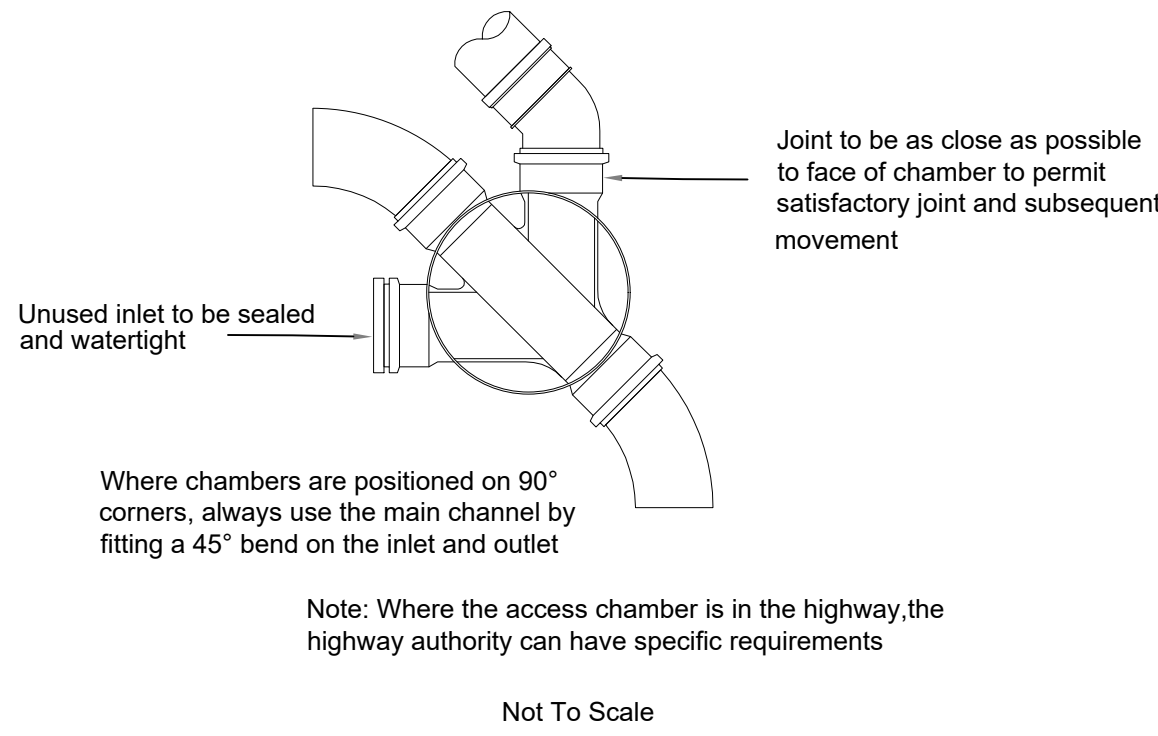

ZONE 2 PERMEABLE PAVING DETAIL

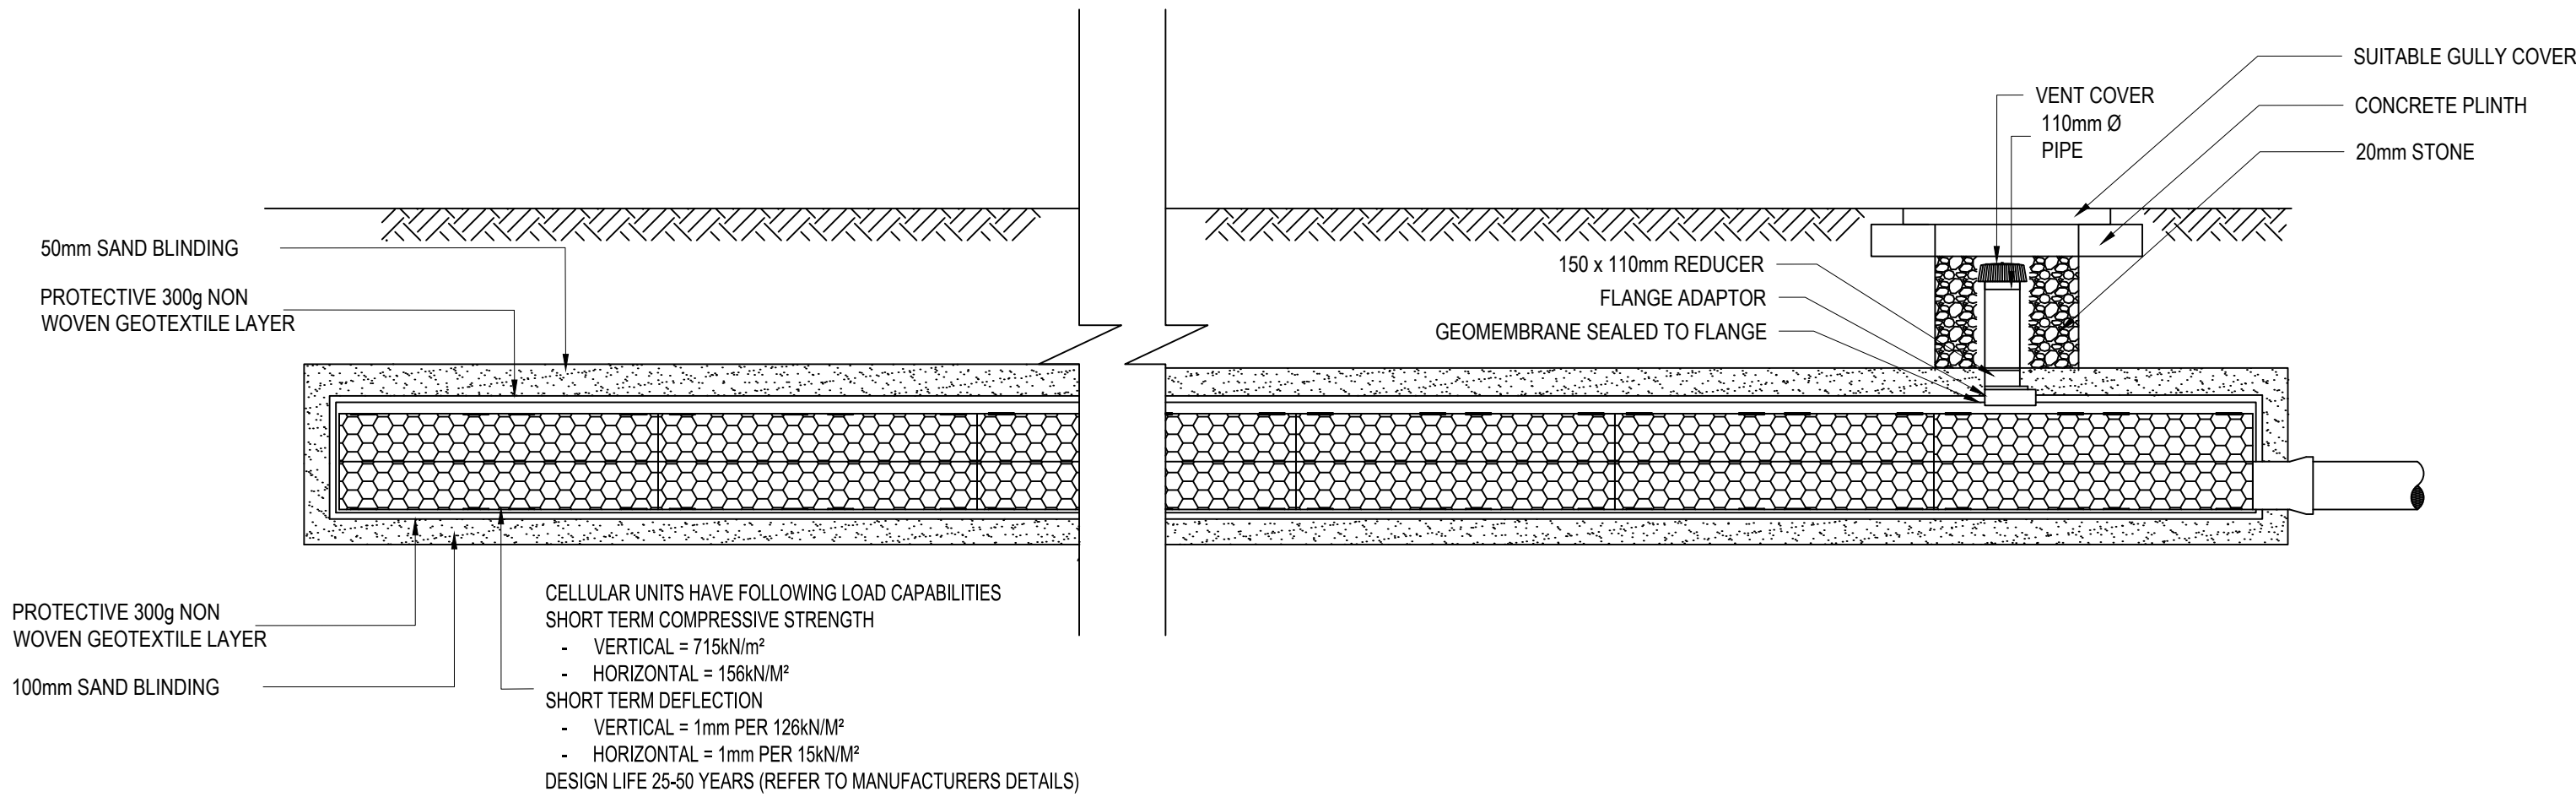

TYPICAL CELLULAR SOAKAWAY

TO BE CONSTRUCTED AND INSTALLED TO MANUFACTURERS SPECIFICATION
SCALE 1:20

Notes

Inspection chambers, manholes, covers and pipes to be constructed in accordance with Design and Construction Guidance Appendix C (DCG-C) version 2.3

01	13-06-25	FIRST ISSUE	PE	MTY	MTY
Rev.	Date	Description	By	Chk'd	App'd

The Drainage Designers

80 Coronation Street, Sunderland, SR1 2HE

Drawing Status	FOR CONSTRUCTION	Suitability	C4
----------------	------------------	-------------	----

Project Title	CROSS GROVE
---------------	-------------

Drawing Title	TYPICAL CONSTRUCTION DETAILS
---------------	------------------------------

Scale	NTS	Designed	PE	Drawn	PE	Checked	MTY	Authorised	MTY
Original Size	A1	Date	13-06-25	Date	13-06-25	Date	13-06-25	Date	13-06-25

Drawing Number	5075-DD-XX-XX-DR-D-0005	Revision	01
----------------	-------------------------	----------	----