


## Access Improvements

Below is an image of the previous access arrangements.



3m of the dyke keel was removed in order to set both the application site gate and the adjacent agricultural field access back as indicated on the images below and the block plan. The area was then laid with hardcore. This was to improve accesses to the fields for the larger agricultural vehicles.

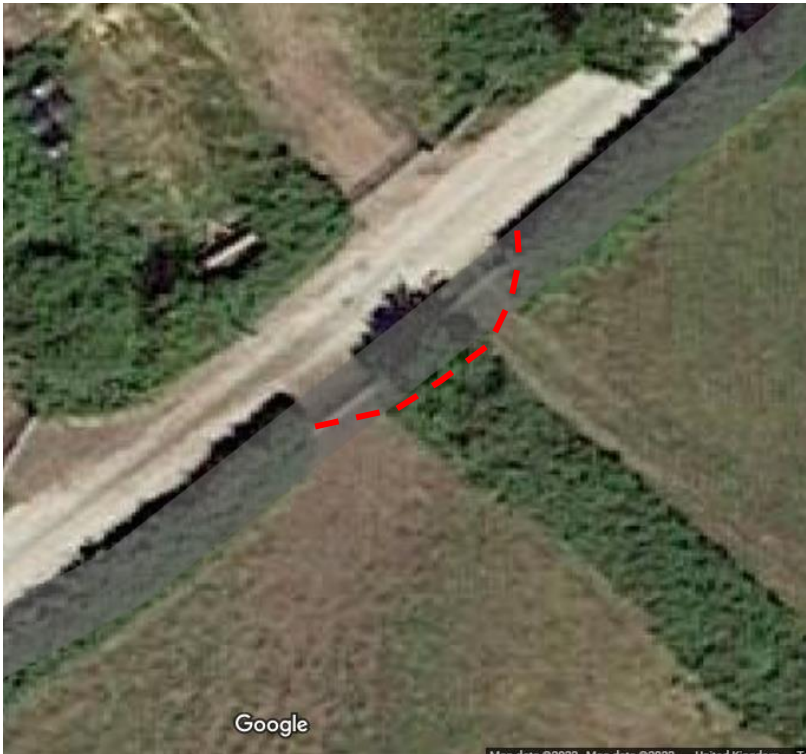