


Product Sheet – Eurocell uPVC Shiplap Cladding Board (Anthracite Grey)

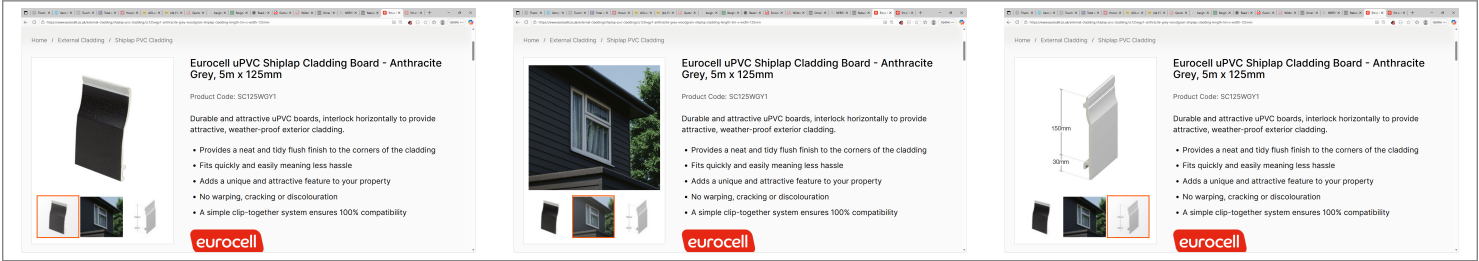

Left to right: Close-up board finish, installed example, profile section.

Manufacturer: Eurocell
Product: uPVC Shiplap Cladding Board
Colour: Anthracite Grey
Finish: Woodgrain
Length: 5,000 mm (5.0 m)
Board Width: 125 mm
Product Code: SC125WGY1

Product Description:
Eurocell uPVC Shiplap Cladding Board is a durable external PVC cladding system designed to interlock horizontally to provide a weather-resistant and visually crisp exterior finish. The Anthracite Grey woodgrain finish offers a modern, low-maintenance appearance suitable for contemporary residential developments.

Technical Data (Eurocell Shiplap uPVC Cladding)

Parameter	Specification
Material	uPVC
Profile Type	Shiplap
Colour	Anthracite Grey
Finish	Woodgrain
Board Length	5,000 mm
Board Width	125 mm
Effective Cover Width	Approx. 110 mm
Coverage per Board	Approx. 0.55 m²
Installation Method	Interlocking horizontal boards fixed to timber battens

Substrate Compatibility	Masonry / Blockwork via treated timber battens
Maintenance	Low – no painting or staining required
Moisture Resistance	Resistant to rot, corrosion and moisture ingress
UV Stability	High resistance to colour fading
Impact Resistance	Good impact resistance for domestic use
Fire Performance	To BS EN 13501-1 (Classification subject to system build-up)
Typical Design Life	20–25 years (system dependent)

Planning Submission Statement:

Eurocell uPVC Shiplap Cladding Board in Anthracite Grey is proposed as a feature cladding material on designated plots within the Hill Top Road development (see approved Cladding Allocation Matrix). The dark contemporary finish complements the development palette of white silicone render, anthracite fenestration and dark roof tiles. The system provides a robust, low-maintenance and visually consistent façade solution, supporting compliance with Policy DM10 relating to visual amenity, quality of materials and long-term durability.

Appendices:

Official Eurocell fixing guides, fire performance certification and warranty documentation to be appended by the applicant.