

Wessex

Interlocking tiles




Technical data

Size of tile	420mm x 330mm
Minimum pitch*	15°
Maximum pitch	90°
Minimum headlap	75mm
Maximum gauge	345mm
Cover width	298mm (nominal)
Hanging length	403mm (nominal)
Covering capacity (net)	9.7 tiles/m ² at 75mm headlap 10.4 tiles/m ² at 100mm headlap
Weight of tiling (approx.)	50 kg/m ² (0.49 kN/m ²) at 75mm headlap 53 kg/m ² (0.52 kN/m ²) at 100mm headlap
Battens required (net)	2.9 lin. m/m ² at 75mm headlap 3.1 lin. m/m ² at 100mm headlap
Batten size recommended	38 x 25mm for rafters/supports not exceeding 450mm centres
(fixed to BS 5534)	50 x 25mm for rafters/supports not exceeding 600mm centres
Tile nails	38mm x 3.35mm
Fixing clips	Eaves, verge and tile clips

* The minimum recommended pitch and lap may be influenced by special circumstances, please refer to pages 26-27 of the Design Considerations section.

Tiles without nail holes should be laid below 25° rafter pitch and where required, should be clipped. Nail holed tiles should be used at rafter pitches of 45° and above. Please indicate if tiles are required with or without nail holes.

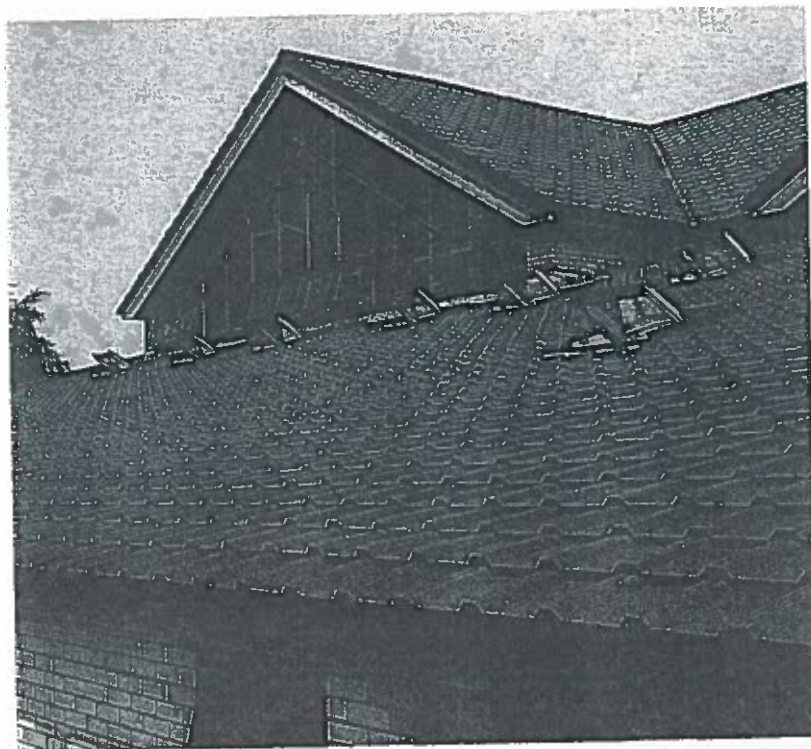

Wessex Smooth Grey commercial development

Designed to shed water efficiently at pitches down to 15°, the Wessex has clean, simple lines with a pleasing minimalist style

Wessex colour availability



**Old English
Dark Red (S)**



Smooth Grey (S)



Smooth Brown (S)

Key
(S) Smooth finish

