
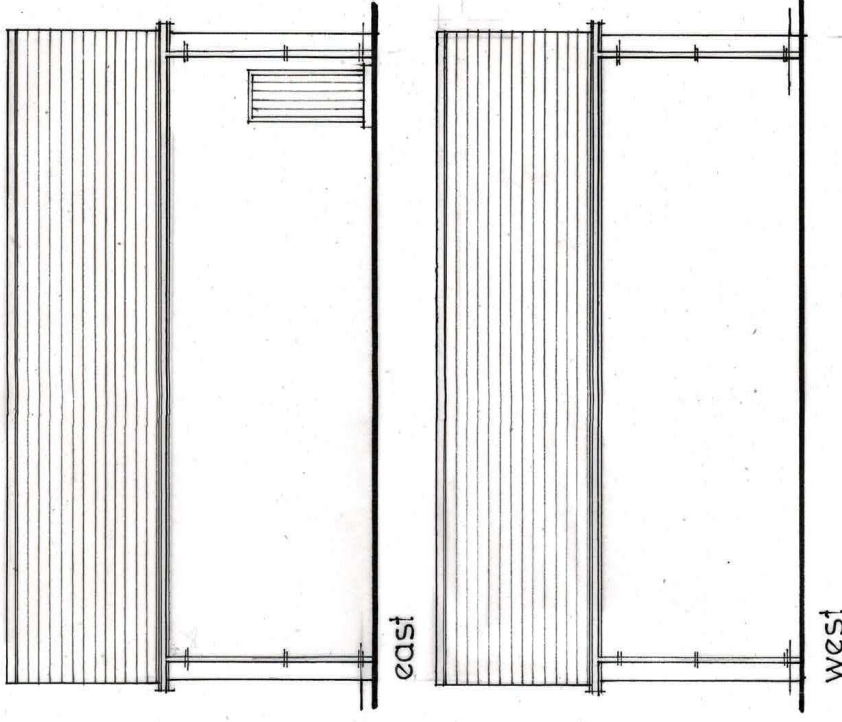


WOODHOUSE STORES, WHITEHAVEN

2 of 2

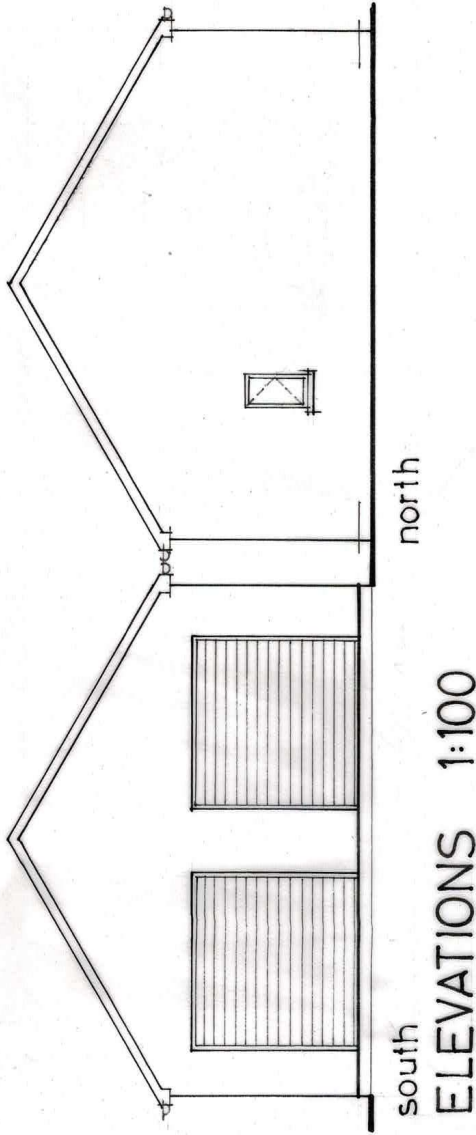


RAINWATER - SURFACE - TO RWGS, WITH RODDING EYES TO 150 MM. Ø HEPSEVE RINGS TO PROP. MK'S & TO 1M³ STONE SOAKAWAY TO I.A. APPROVED POSITION (SUBJECT TO CBC PERCOLATION TEST) Foul - PROVIDE POTENTIAL CONNECTIONS AS SHOWN IN 150 MM. Ø HEPSEVE TO MM, & TO EXTG. SYSTEM OF ADJACENT BUILDING, ALL TO SATISFACTION OF I.A.

ROLLER SHUTTER DOORS FIXED TO OPENINGS, WITH CATNIC LINTOLS OVER - TYPE CATNIC CGIS INSULATED LINTOLS OVER OFFICE WINDOW & DOOR OPENINGS.

BLOCK PLAN 1:500 INDICATES LOCATION OF BUILDING, & DELIVERY APRON ALONGSIDE, WITH CAR PARKING ADJACENT TO BUILDINGS. EXISTING 2.4 METRE HIGH RAILSIDE SECURITY FENCE EXTENDED AS SHOWN DOTTED - DETAILS TBC.

WINDOWS/DOORS - UPVC WHITE AS SHOWN, TO BS 6246:1981

INITIAL SMOKE DETECTORS AS SHOWN TO I.A. AGREED POSITIONS, & LINKED TO ADJACENT BUILDING TYPE - SEC FIRE SERVICE APP'D, WITH 72-HR. BATTERY BACK UP, TO BS 5446.

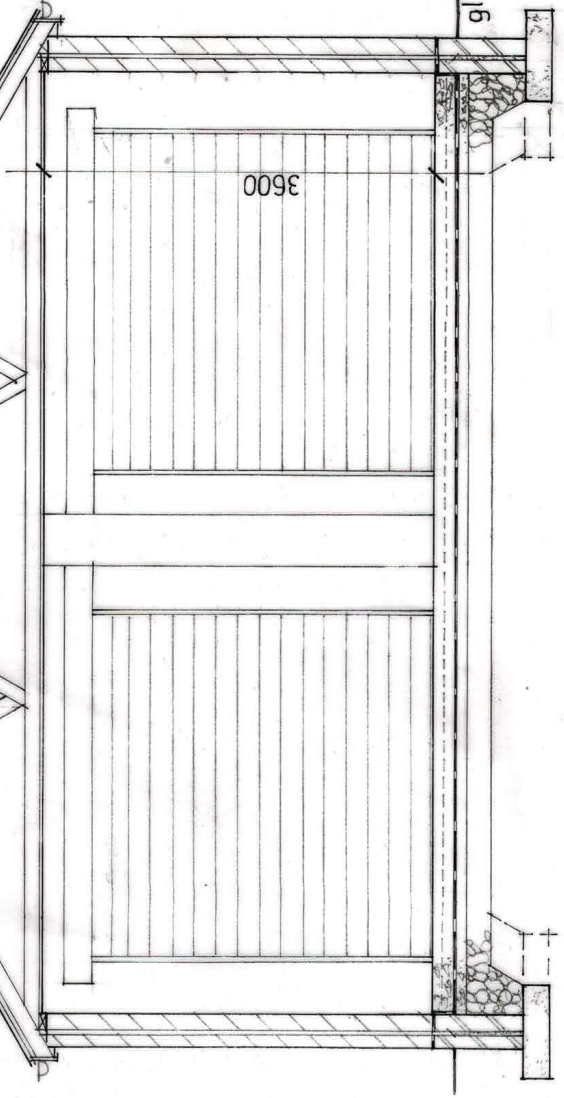

SECTION aa 1:50