




Order Code: CWS90T2NWB

CITY WL MINI High Performance Wall Light Black 7W - T2 Road Wide Optic - Fixed Output - 4000K

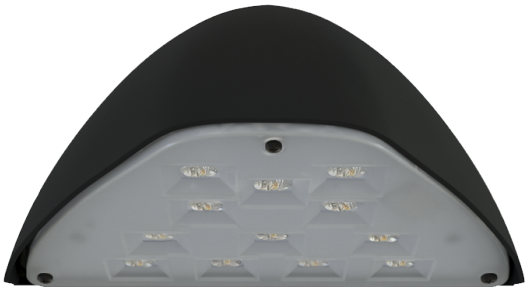

Features

- Suitable for exterior building and feature lighting
- Wall mounted
- CRI: Ra>80
- T2 Road Wide optic
- Up to 129 lumens per Watt efficacy

Construction

- Die-cast aluminium body finished in grey (RAL 9006) or black (RAL 9005)
- Integral driver, simplifying installation and reducing maintenance

To Specify


CITY WL MINI High Performance Wall Light Black 7W - T2 Road Wide Optic - Fixed Output - 4000K as per Tamlite CITY WL MINI range.



Technical Data

General		Electrical		Driver	
Luminaire Wattage (W)	7	Rated Input Current (A)	0.033	Driver Current (mA)	180
Weight (kg)	0.86	Power Factor (pf)	0.92	Forward Voltage (V)	33
Operating Temperature (°C)	0 to 25	Input Voltage Range (VAC)	220 - 240	Driver Lifetime (HRS)	50000
Light Output		Inrush Current Peak (A)	8.2		
Lumens (lm)	900	Surge Protection (kV)	2		
Efficacy (lm/W)	129	Total Harmonic Distortion (THD)	10		
Beam Angle (FWHM°)	141	Output LF Ripple	4		
Life		Conductor Size (mm)	0.5 - 2.5		
L90 Lifetime (HRS)	47041	Terminal Type	3 pole grip wire		
L80 Lifetime (HRS)	94000	LED			
L70 Lifetime (HRS)	96000	CCT (K)	4000		
		CRI	>80		
		Macadam Ellipses	2.8		

Photometrics

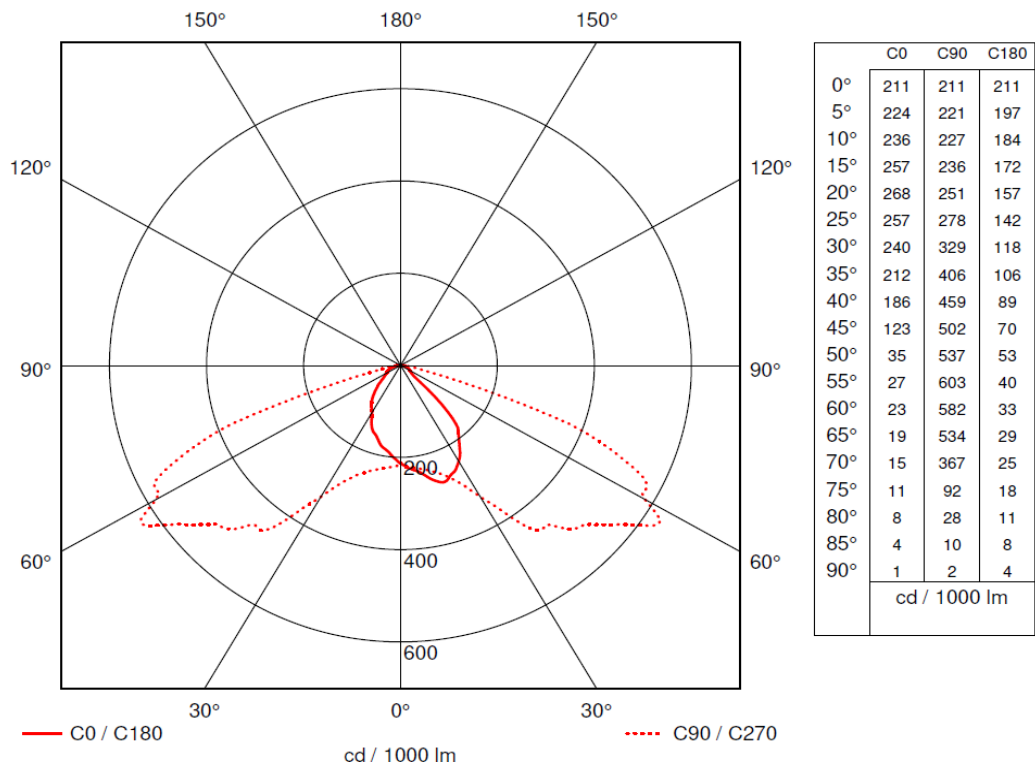

Dimensions

