



GivEnergy[®]

2020
V1.9D

CONTENTS

Home Energy Storage Systems

Hybrid Inverter	01-03
Long Body Hybrid	04-06
AC Coupled Inverter	07-09
Long Body AC Coupled	10-12
3 Phase Hybrid	13-15

Domestic Battery Packs

LiFePO ₄ Battery Packs 2.6 ECO	16-17
LiFePO ₄ Battery Packs	18-19

Safety Devices

PV Protect - Safety DC Relay Unit	20-21
Voltage Optimiser	22-23

Metering And Monitoring Devices

Metering EM418	24-25
Metering EM115 with CT	26-27
Dongles WiFi / GPRS	28-29

System Operation

Operating Modes	30
Monitoring Portal	31
Mobile App-IOS	32
Product Flow Diagram	33

Commercial Energy Storage Systems


Scaleable Battery Cabinet	35-36
Rack Mounted Battery	37-38
External Access Container	39-40
Terminal Support Unit (TSU)	41
10ft Container ESS	42
Integration 11kV Schematic	43
Commercial Battery Cells, Packs and Racks	44
Commercial OEM Installations	45
TSU Specifications	46
Bi-directional PCS	47-49
Master BMS (Battery Management System)	50

Services

Additional Services	51
Installations around the world	52
OEM UK Installation	53-55
About our Company	56
Contact Us	57

GivEnergy[®]

Home Energy Storage Systems

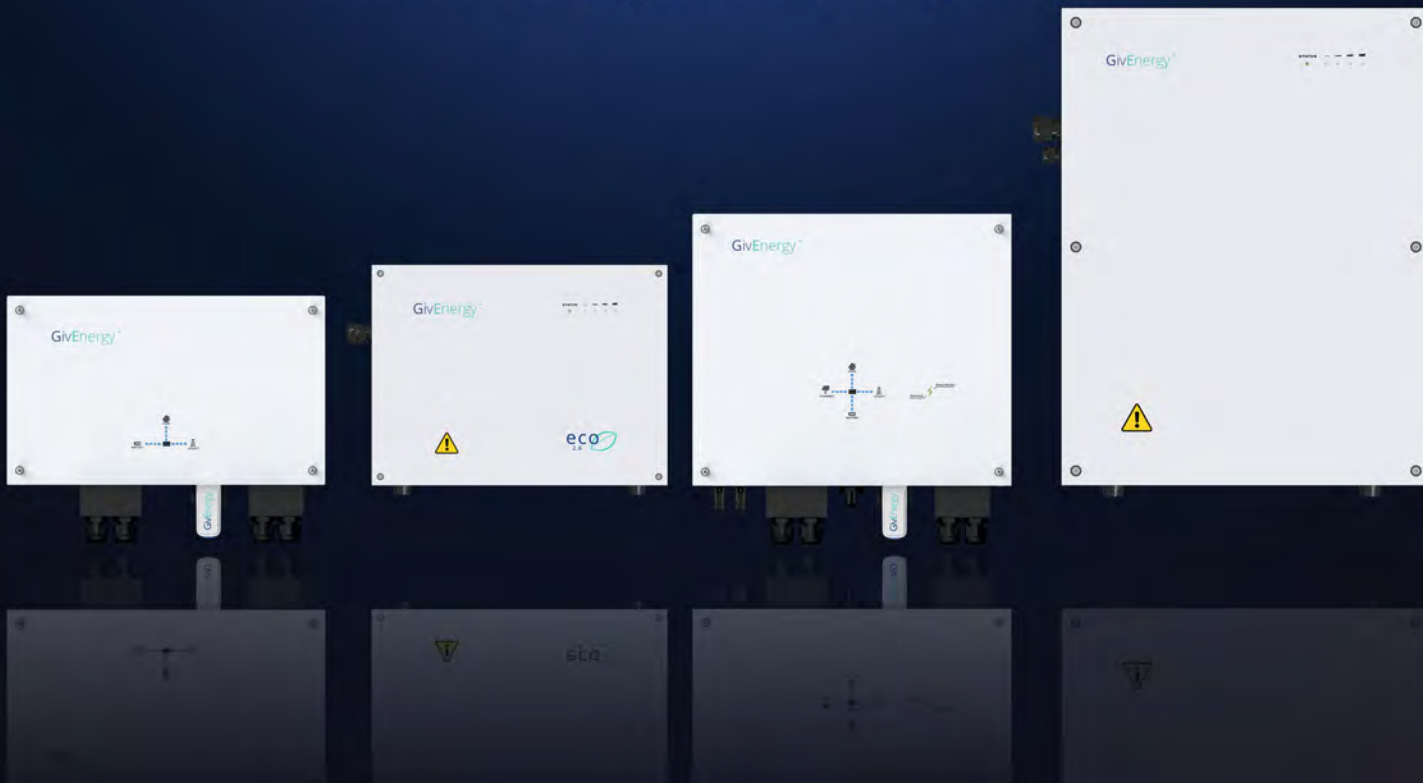


Hybrid System

Home Hybrid Inverter



- ◆ Compatible with GivEnergy LiFePO₄ battery packs
- ◆ Backup up power (2.5kW) output during a black out
- ◆ Installed to new builds or retrofit to an existing solar PV system
- ◆ IP65 water-resistant for exterior install
- ◆ Remote software updating via WiFi / 4G dongle
- ◆ Cloud based monitoring and control through web / app interface
- ◆ Batteries are able to charge directly from Solar PV and the Grid, Utilising a flexible energy tariff
- ◆ Available in 3.6kW & 5.0kW models

Dimensions (W/H/D) 480*440*260mm
Weight 24kg



GivEnergy®

Input Data (DC)	Giv-HY3.6	Giv-HY5.0
Max DC power	4500W	6500W
Max DC voltage	600V	
Start voltage	120V	
DC nominal voltage	360V	
PV voltage range	100V-600V	
MPPT voltage range	120V-550V	
Max input current per string of tracker A/tracker B	11A/11A	
Number of independent MPPT input	2	
Feedback current to the array	0A	

Output Data (AC)		
Nominal AC output power	3680W	5000W
Max AC apparent power	3680VA	5000VA
Max output current	16.4A	21.7A
AC nominal voltage; range	220V/230V/240V;180Vac-280Vac	
AC grid frequency; range	50,60Hz; ± 5 Hz	
Power factor at rated power	1	
Power factor	0.9leading...0.9lagging	
THDi	<3%	
AC connection	Single phase(can be linked for three phase)	

Battery		
Battery type	LiFePO ₄	
Nominal Power	2500W	
Nominal voltage	51.2V	
Battery capacity	≥ 61.5 Ah	
Max discharging /charging power	2500W/2500W	
Charging curve	3-stage adaptive with maintenance	
Operating voltage range	46-57V	
Max charging/discharging current	50A / 50A	

Emergency Backup Power Output		
Output rated power	97.00%	97.10%
Output voltage	96.50%	96.50%
Maximun efficiency	99.50%	99.50%

Specification

Hybrid
Giv-HY3.6 / Giv-HY5.0



Protection Devices	Giv-HY3.6	Giv-HY5.0
--------------------	-----------	-----------

DC reverse polarity protection	Yes
DC switch rating for each MPPT	Yes
Output over current protection	Yes
Output overvoltage protection-varistor	Yes
Ground fault monitoring	Yes
Grid monitoring	Yes
Max inrush current	30A peak
Max output fault current	40A peak
Max output overcurrent protection	25A rms
Integrated all pole sensitive leakage current monitoring unit	Yes

General Data

Dimensions (W / H / D)	480*440*260mm
Weight	24kg
Operating temperature range	-25°C>55°C (Ambient)
Noise emission (typical)	≤ 6 dB(A)
Altitude	Up to 2000m(6560ft)Without power derating
Relative humidity	95%
Consumption: operating (standby) / night	<5W / < 0.5 W
Topology	Transformerless
Cooling concept	Natural
Environmental Protection Rating	IP65

Features

PV connection	H4/MC4
Battery connection	Screw terminal
AC connection	Screw terminal
Display	LED
Interfaces:Wi-Fi/USB/GPRS/RS485/4G	Opt/Yes/Opt/Yes/Yes
Warranty: 5 years / 10 years / 15 years	Yes/Opt/Opt

Certificates and Approvals

TÜV CE, TÜV IEC 62109-1&2, TÜV VDE 0126-1-1, TÜV G83/2, TÜV G59/3, TÜV AS4777&AS/NZS 3100, EN50438, SAA, TÜVG98/1-4:2019, G99

Specification

Hybrid
Giv-HY3.6 / Giv-HY5.0



Long Body Hybrid

Giv-HY3.6L / Giv-HY5.0L



Extra Features Included in the Long Body design.

- ◆ Dual PV Switches
- ◆ Battery Switch
- ◆ Back up RCD Switch
- ◆ Main AC Switch
- ◆ Bi-Directional MID Approved meter (EN 50470-3) Class 1
- ◆ In-Built WiFi

Dimensions (W/H/D)	480*700*260mm
Weight	30kg



Input Data (DC)	Giv-HY3.6	Giv-HY5.0
Max DC power	4500W	6500W
Max DC voltage	600V	
Start voltage	120V	
DC nominal voltage	360V	
PV voltage range	100V-600V	
MPPT voltage range	120V-550V	
Max input current per string of tracker A/tracker B	11A/11A	
Number of independent MPPT input	2	
Feedback current to the array	0A	

Output Data (AC)		
Nominal AC output power	3680W	5000W
Max AC apparent power	3680VA	5000VA
Max output current	16.4A	21.7A
AC nominal voltage; range	220V/230V/240V;180Vac-280Vac	
AC grid frequency; range	50,60Hz;±5 Hz	
Power factor at rated power	1	
Power factor	0.9leading...0.9lagging	
THDi	<3%	
AC connection	Single phase(can be linked for three phase)	

Battery	
Battery type	LiFePO ₄
Nominal Power	2500W
Nominal voltage	51.2V
Battery capacity	≥61.5Ah
Max discharging /charging power	2500W/2500W
Charging curve	3-stage adaptive with maintenance
Operating voltage range	46-57V
Max charging/discharging current	50A / 50A

Emergency Backup Power Output		
Output rated power	97.00%	97.10%
Output voltage	96.50%	96.50%
Maximun efficiency	99.50%	99.50%

Specification

Long Body Hybrid
Giv-HY3.6L / Giv-HY5.0L



Protection Devices

Giv-HY3.6

Giv-HY5.0

DC reverse polarity protection	Yes
DC switch rating for each MPPT	Yes
Output over current protection	Yes
Output overvoltage protection-varistor	Yes
Ground fault monitoring	Yes
Grid monitoring	Yes
Max inrush current	30A peak
Max output fault current	40A peak
Max output overcurrent protection	25A rms
Integrated all pole sensitive leakage current monitoring unit	Yes

General Data

Dimensions (W / H / D)	480*700*260mm
Weight	30kg
Operating temperature range	-25°C>55°C
Noise emission (typical)	≤ 6 dB(A)
Altitude	Up to 2000m(6560ft)Without power derating
Relative humidity	95%
Consumption: operating (standby) / night	<5W / < 0.5 W
Topology	Transformerless
Cooling concept	Natural
Environmental Protection Rating	IP65

Features

PV connection	H4/MC4
Battery connection	Screw terminal
AC connection	Screw terminal
Display	LED
Interfaces:Wi-Fi/USB/GPRS/RS485/4G	Opt/Yes/Opt/Yes/Yes
Warranty: 5 years / 10 years / 15 years	Yes/Opt/Opt

Certificates and Approvals

TÜV CE, TÜV IEC 62109-1&2, TÜV VDE 0126-1-1, TÜV G83/2, TÜV G59/3, TÜV AS4777&AS/NZS 3100, EN50438, SAA, TÜV G98/1-4:2019, G99

Specification

Long Body Hybrid
Giv-HY3.6L / Giv-HY5.0L



GivEnergy®

AC Coupled

Giv-AC3.0



- ◆ Installed to new builds or retrofitted to an existing solar pv system
- ◆ Charge the batteries directly from Solar PV by measuring the existing PV system via a CT
- ◆ Batteries can be charged directly from the Grid
- ◆ Remote software updating via Wi-Fi dongle
- ◆ Monitor your usage and generation through Web and APP interface
- ◆ Designed to be Lightweight and compact and to maximise self-consumption and minimise imported electricity
- ◆ Monitoring home usage with Integrated smart metering for an accurate reading

Dimensions (W/H/D)	480*290*260mm
Weight	19kg



GivEnergy®

Output Data (AC)

Nominal AC output power	3000W
Max AC apparent power	3000VA
Max output current	15A
AC nominal voltage; range	220V/230V/240V;180Vac-280Vac
AC grid frequency; range	50,60Hz; ± 5 Hz
Power factor at rate power	1
Power factor	0.9 leading...0.9 lagging
THDi	<3%
AC connection	Single phase(can be linked for three phase)

Battery

Battery type	LiFePO ₄
Nominal Power	3000W
Normal voltage	51.2V
Max discharging /charging power	3000W
Charging curve	3-stage adaptive with maintenance
Operating voltage range	46.4-57.6V
Max charging/discharging current	60A / 60A

Backup Output

Output rated power	3000VA
Peak power	3600VA,10s
Output voltage	230Vac $\pm 2\%$, 50Hz (60Hz Optional) $\pm 0.2\%$, THDV<3% (linear load)

Efficiency

Max efficiency	97.10%
Euro-ETA	96.5%

Specification

AC Coupled
Giv-AC3.0



GivEnergy®
08

Protection Devices

DC reverse polarity protection	Yes
DC switch rating for each MPPT	Yes
Output over current protection	Yes
Output overvoltage protection-varistor	Yes
Ground fault monitoring	Yes
Grid monitoring	Yes
Max inrush current	30A peak
Max output fault current	40A peak
Max output overcurrent protection	25A rms
Integrated all pole sensitive leakage current monitoring unit	Yes

General Data

Dimensions (W / H / D)	480*290*260mm
Weight	19kg
Operating temperature range	-25°C to 60°C (-13°F to 140°F) With derating above 45°C
Noise emission (typical)	≤ 25 dB(A)
Altitude	Up to 2000m(6560ft)Without power derating
Relative humidity	95%
Consumption: operating (standby) / night	<5W / < 0.5 W
Topology	Transformerless
Cooling concept	Natural
Environmental Protection Rating	IP65

Features

PV connection	No
Battery connection	Screw terminal
AC connection	Screw terminal
Display	LED
Interfaces:Wi-Fi/USB/GPRS/RS485/4G	Opt/Yes/Opt/Yes/Yes
Warranty	5 years / 10 years (Optional)/15years (Optional)

Certificates

AS 4777, VDE-AR-N4105, VDE0126, G83, G98, IEC62109-1-2, IEC62040, EN61000-6-2, EN61000-6-3, EN50438

Specification

AC Coupled
Giv-AC3.0



GivEnergy® 09

Long Body AC Coupled

Giv-AC3.0L

- ◆ Smart Demand Management
- ◆ Mobile App Available
- ◆ Wi-Fi/4G/RJ45
- ◆ Cloud based monitoring and control
- ◆ Monitor renewable generation from any source

Extra Features included in the long body design

- ◆ Battery Switch
- ◆ Back up RCD Switch
- ◆ Main AC Switch

Dimensions (W/H/D) 480*550*260mm
Weight 30kg



GivEnergy®

Output Data (AC)

Nominal AC output power	3000W
Max AC apparent power	3000VA
Max output current	15A
AC nominal voltage; range	220V/230V/240V;180Vac-280Vac
AC grid frequency; range	50,60Hz; ± 5 Hz
Power factor at rate power	1
Power factor	0.9 leading...0.9 lagging
THDi	<3%
AC connection	Single phase(can be linked for three phase)

Battery

Battery type	LiFePO ₄
Nominal Power	3000W
Normal voltage	51.2V
Max discharging /charging power	3000W
Charging curve	3-stage adaptive with maintenance
Operating voltage range	46.4-57.6V
Max charging/discharging current	60A / 60A

Backup Output

Output rated power	3000VA
Peak power	3600VA,10s
Output voltage	230Vac $\pm 2\%$, 50Hz (60Hz Optional) $\pm 0.2\%$, THDV<3% (linear load)

Efficiency

Max efficiency	97.10%
Euro-ETA	96.5%

Specification

Long Body AC Coupled
Giv-AC3.0L



Protection Devices

DC reverse polarity protection	Yes
DC switch rating for each MPPT	Yes
Output over current protection	Yes
Output overvoltage protection-varistor	Yes
Ground fault monitoring	Yes
Grid monitoring	Yes
Max in rush current	30A peak
Max output fault current	40A peak
Max output overcurrent protection	25A rms
Integrated all pole sensitive leakage current monitoring unit	Yes

General Data

Dimensions (W / H / D)	480*550*260mm
Weight	25kg
Operating temperature range	-25°C to 60°C (-13°F to 140°F) With derating above 45°C
Noise emission (typical)	≤ 25 dB(A)
Altitude	Up to 2000m(6560ft)Without power derating
Relative humidity	95%
Consumption: operating (standby) / night	<5W / <0.5 W
Topology	Transformerless
Cooling concept	Natural
Environmental Protection Rating	IP65

Features

PV connection	No
Battery connection	Screw terminal
AC connection	Screw terminal
Display	LED
Interfaces:Wi-Fi/USB/GPRS/RS485 /4G	Opt/Yes/Opt/Yes/Yes
Warranty	5 years / 10 years (Optional)/15years (Optional)

Extra Features included in the long body design.	Main AC Switch Battery Switches Back up RCD Switch EPS pre-installed for super fast fit
--	--

Certificates

AS 4777, VDE-AR-N4105, VDE0126, G83, G98, IEC62109-1-2, IEC62040, EN61000-6-2, EN61000-6-3, EN50438

Specification

Long Body AC Coupled
Giv-AC3.0L



GivEnergy®

3 Phase Hybrid System

Hybrid Inverter



- ◆ Compatible with GivEnergy LiFePO₄ battery packs
- ◆ Charging and discharging (10kW)
- ◆ Suitable for small commercial properties
- ◆ Designed to maximise self-consumption and minimise imported electricity
- ◆ Back up for essential loads
- ◆ Remote software updates via Wi-Fi / 4G Dongle
- ◆ Active and reactive power control (instantly)
- ◆ Comprehensive monitoring

Dimensions (W/H/D) 650*460*210mm
Weight 40kg



GivEnergy®

Input Data (DC)	Giv-3P-HY6.0	Giv-3P-HY8.0	Giv-HY10
Max DC power	7800W	10400W	1300W
Max DC voltage		1000V	
Start voltage		200V	
DC nominal voltage		600V	
PV voltage range		280V-800V	
MPPT voltage range		120V-550V	
Max input current per string of tracker A/tracker B		11A/11A	
Number of independent MPPT input		2/1	

Output Data (AC)			
Nominal AC output power	6000W	8000W	10000W
Max AC apparent power	6000W	8000W	10000W
Max output current	10.0A	13.0A	16.0A
AC nominal voltage; range		380V/400V; 310V-480V	
AC grid frequency; range		50,60Hz; ± 5 Hz	
Power factor at rated power		1	
Power factor		0.8leading...0.8lagging	
THDi		<3% (<1.5% @ Full load)	

Battery	
Battery type	Li-ion or Lead-acid
Nominal voltage	384V
Max discharging /charging power	10000W / 10000W
Charging curve	3-stage adaptive with maintenance
Operating voltage range	352V-456V
Max charging/discharging current	25A / 25A

Emergency Backup Power Output	
Output rated power	10000W (3-phase asymmetrical load)
Output voltage	230V, 50/60Hz ± 5 Hz
Maximun efficiency (Peak Power)	15000W for 10ms; 12000W for 10s
THDv	<3%
Switch Time	<10ms

Specification

3 Phase Hybrid
Giv-3P-HY6.0 / Giv-3P-HY8.0
Giv-3P-HY10



GivEnergy®

Efficiency	Giv-3P-HY6.0	Giv-3P-HY8.0	Giv-HY10
Euro-ETA	97.5%	97.5%	97.5%
MPPT efficiency	99.9%	99.9%	99.9%
Max efficiency	98.0%	98.3%	98.3%
Max battery to load efficiency	94.0%	94.0%	94.9%

Protection Devices

DC reverse polarity protection	Yes
DC switch rating for each MPPT	Yes
Output over current protection	Yes
Output overvoltage protection-varistor	Yes
Ground fault monitoring	Yes
Grid monitoring	Yes
Integrated leakage current monitoring unit	Yes

General Data

Dimensions (W / H / D)	650*460*210mm
Weight	40kg
Operating temperature range	-25°C/+60°C (-13°F/+140°F) With derating above 45°C (113°F)
Noise emission (typical)	≤ 25 dB(A)
Altitude	Up to 2000m(6560ft)Without power derating
Relative humidity	95%
Consumption: operating (standby) / night	<5W / < 0.5 W
Cooling concept	Natural
Environmental Protection Rating	IP65

Features

PV connection	H4/MC4
Battery connection	Screw terminal
AC connection	Screw terminal
Display	LED
Interfaces:Wi-Fi/USB/GPRS/RS485	Opt/Yes/Opt/Yes
Warranty: 5 years / 10 years / 15 years	Yes/Opt/Opt

Certificates and Approvals

G99 / CE,IEC 62109-1&2, VDE 0126-1-1,G59/2, AS4777&AS/NZS 3100, EN50438

Specification

3 Phase Hybrid
Giv-3P-HY6.0 / Giv-3P-HY8.0
Giv-3P-HY10



Battery Storage

Giv-Bat-ECO-2.6



- ◆ Using the latest LiFePO₄ prismatic cell technology
- ◆ Warranted for 10 years or throughput of 10 MWh per 1kWh of stored capacity
- ◆ 0.5C-1C charge and discharge rate
- ◆ 170Wh per Kg +/- 5%
- ◆ Plug & Play functionality
- ◆ Active BMS system allowing greater control and functionality
- ◆ Scalable Battery Packs - Up to 5 per inverter in 2020
- ◆ Fully Recyclable at end of life
- ◆ IP65



GivEnergy®

Specification

Giv-Bat-ECO-2.6

Model	Giv-Bat-ECO-2.6
Capacity	2.6kWh
Voltage	51.2VDC
Current	51Ah
IP Grade	IP65
BMS	Robust multi point monitoring BMS pre installed
Life cycling (80% DOD, 25°C)	10years
Operation temperature	-20°C~55°C
Storage Temperature	-30°C~60°C
Warranty BTT	26MWh
	10 years, whichever comes sooner
Standard	UN 38.3, IEC61000
Weight	37.5kg
Dimensions	369*480*220 mm

Electrical Parameters

Operating voltage range	45.0V - 57.2V DC
Maximum Charging Voltage	57.9VDC
Maximum charging/ Discharging current	60A / 60A
Network Interface	RS485
Communication Protocols	Modbus
Advantages	Stackable, BMS upgradeable, *IP65



Battery Storage

LiFePO₄

- ◆ Using the latest LiFePO₄ prismatic cell technology
- ◆ Warranted throughput of 10 MWh per 1kWh of stored capacity
Or 10 Years, Whichever comes first
- ◆ 0.5C-1C charge and discharge rate
- ◆ 170Wh per Kg +/- 5%
- ◆ Active BMS system allowing greater control and functionality
- ◆ Scalable Battery Packs - Up to 5 per inverter in 2020
- ◆ Fully Recyclable at end of life
- ◆ IP65



GivEnergy®

Specification

LiFePO₄ Battery


Model	Giv-Bat2.6	Giv-Bat5.2	Giv-Bat8.2
Capacity	2.6kWh	5.2kWh	8.2kWh
Voltage	51.2VDC	51.2VDC	51.2VDC
Current	51Ah	102Ah	160Ah
IP Grade	IP65	IP65	IP65
BMS	Robust multi point monitoring BMS pre installed		
Life cycling (80% DOD, 25°C)		10years	
Operation temperature		0°C~45°C	
Storage Temperature		-30°C~60°C	
Warranty BTT	26MWh	52MWh	Unlimited Cycles
		10 years, whichever comes sooner	
Standard		UN 38.3, IEC61000	
Weight	37.5kg	58kg	74kg
Dimensions	369*480*220 mm	515*480*205 mm	480*620*220 mm

Electrical Parameters


Operating voltage	45VDC-57.2VDC
Maximum Charging Voltage	58VDC
Maximum charging/ Discharging current	60A/60A
Network Interface	RS485
Communication Protocols	Modbus
Advantages	Stackable, BMS upgradeable, *IP65



Cell Technonlogy Prismatic LiFePO₄

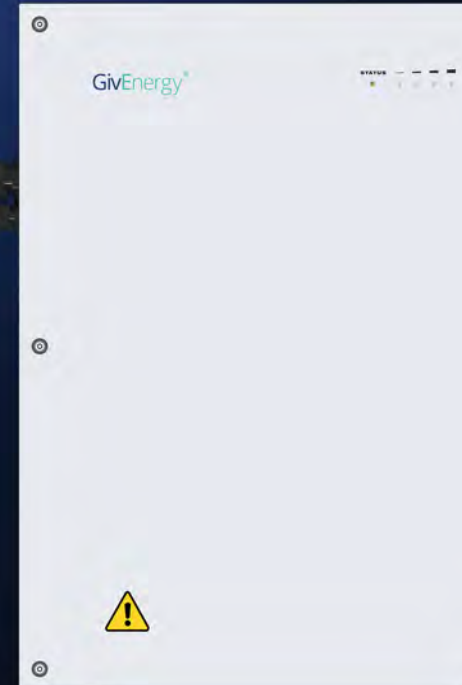

GivEnergy®

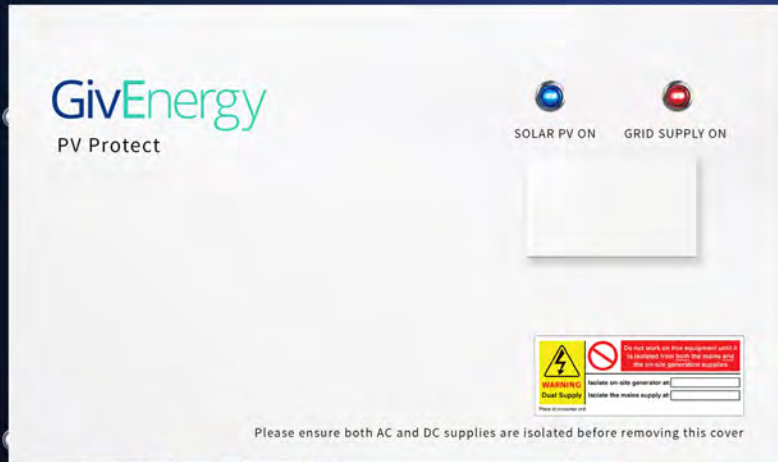

- ◆ Fully compliant with SEAI Guidelines
- ◆ Plug And Play
- ◆ Dual MPPT input 1000V DC 20A
- ◆ High Voltage Automatic DC Connector Relay
- ◆ Disconnects PV supply when Grid fails
- ◆ Automatically reinstates PV supply when grid is stable
- ◆ Programmable time delay
- ◆ Programmable grid settings
- ◆ Standard 5 year warranty
- ◆ Non invasive, low maintenance requirement

Specification

PV Protect

Input Data (DC)

DC input Minimum/Maximum Voltage	50V-1000V
DC Nominal Current	20A
MAX DC Short circuit Current	750A
Terminals	MC4-IP65
MPPT	2 (in and out)

AC


AC working Voltage	230Vac 50Hz Single Phase
Voltage Protection	Programmable
Overvoltage Setting Range	220VAC-290VAC
Low voltage Setting Range	150VAC-219VAC
Voltage Recovery time Setting Range	1s-256s
Self consumption	≤5W
MCB	16A
AC supply connection	1A

Others

Dimensions(W*H*D)	310*200*93.5
Install	Wall Mounted
Weight	3.8kG
LED	PV and Grid Working Lights
Working Temperature	-20°C to 50°C
IP	IP20 / IP67 available
Enclosure	Mild Steel Powder Coated

Warranty

5 Years Parts Only

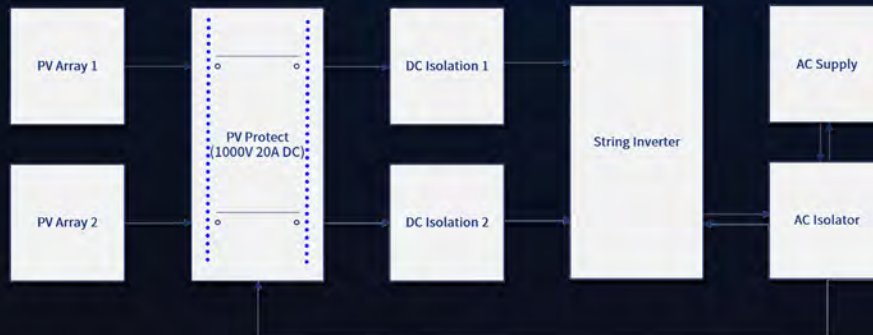

GivEnergy®

Voltage Optimiser

3 Tap (Selectable)
Giv-VO-360



- ◆ Digital display to show the output voltage
- ◆ Built in Voltage protection
- ◆ Prevent wear on appliances caused by electrical over supply and power surges
- ◆ Simple installation
- ◆ Works with, and improves the efficiency of, heat pumps and PV systems
- ◆ Thermal Protection
- ◆ Admendment 3 compliant
- ◆ Manufactured to the highest British manufacturing standards
- ◆ Saves money on your electricity bills

Specification

3 Tap (Selectable)
Giv-VO-360

Description	GIV-VO-360 Domestic Voltage Optimisation Unit
Input(Volts)	Nominal input voltage 230v + 10% - 6%, 50 Hz, Single Phase AC
Output(Volts)	Nominal input voltage less 6, 12 or 18V (selectable)
Max Load	14.4kW
Dimensions	450mmx280mmx110mm
Weight	Approximately 18kgs
Operating Temperature	-5°C to + 55°C
Terminal Capacity	Incoming Both Live and Neutral=35.0mm ² Outgoing Both Live and Neutral=35.0mm ²
Miniature Circuit Breaker	63Amp 6kA Type to BS EN 60898
Enclosure	Mild Steel Power Coated
Ingress Protection	IP20
Cable Entry	Bottom - 2x25mm compression glands
Standards	MCBs to BS EN 60898
Warranty	The Giv-VO-360 voltage optimisation unit is guaranteed for a period of 5 years from date of purchase. This warranty is limited the replacement of faulty components only.



Voltage
Reduced &
Stabilised



Electricity
bills cut



GivEnergy®

Metering EM418

single phase energy meter-100A-Modbus- Multi-rates



- ◆ MID approved with appendix "B" and "D" certification
- ◆ Single phase metering 4.5 din modules
- ◆ Direct metering up to 100A
- ◆ LCD display, 6 integer 2 decimal, meter display when power fails
- ◆ Clear green backlight display
- ◆ S0 pulse output
- ◆ Modbus RTU with 16 bit CRC
- ◆ 1,2,3 and 4 tariff meter option
- ◆ Accuracy class B according to EN50470-3
- ◆ Accuracy class 1 according to IEC62053-21
- ◆ Memory back-up (EEPROM)
- ◆ Import / Export / Generation and Consumption
- ◆ NET Metering to comply with OFGEM regulations on Co-Located Storage

Characteristics

Type of measurement	Voltage, Ampere, kW, kvar, PF, Hz, +kWh, -kWh, ΣkWh, -kvarh, +kvarh
Rated current	100A
Rated Voltage	230V
Frequency (Hz)	50 or 60Hz
Maximum current	100A
Maximum value measured	999999.99kWh
Power consumption	<2W 10VA
Current terminals flexible 1×mm ²	0-16mm ²
RS485 cable	AWG18
another terminal flexible 1×mm ²	0-2.5mm ²

Time of use

Rates	0~4
Separate Import & Export Registers	585
Programmable special days	64
Time-keeping accuracy	<0.5S/day
Power off clock running time	>5 years

Modbus serial comms

Protocol	Modbus RTU with 16 bit CRC
Baud Rate(bps)	1200,2400,4800,9600(default)
Bus loading(pcs)	< 64

Dimension

Width (mm)	76
Height (mm)	104.5
Depth (mm)	60

Environmental

Operating temperature	-25°C - +55°C
Storage temperature	-40°C - +70°C

Specification

EM418



GivEnergy®

Metering EM115

single phase energy meter-45A-Modbus



- ◆ MID approved with appendix "B" and "D" certification
- ◆ Single phase metering 1 din modules
- ◆ Direct metering up to 100A
- ◆ LCD display, 6 integer 2 decimal
- ◆ Clear green backlight display
- ◆ S0 pulse output
- ◆ Modbus RTU with 16 bit CRC
- ◆ 1,2,3 and 4 tariff meter option
- ◆ Accuracy class B according to EN50470-3
- ◆ Accuracy class 1 according to IEC62053-21
- ◆ Memory back-up (EEPROM)
- ◆ Import / Export / Generation and Consumption
- ◆ NET Metering to comply with OFGEM regulations on Co-Located Storage
- ◆ With bi-directional energy measurement, this meter is ideal for solar PV energy metering. Direct/CT connection
- ◆ Solid or split CT options

Characteristics

Type of measurement	Voltage ,Ampere ,kW, PF,Hz, +kWh ,-kWh ,L kWh
Rated current	5A
Rated Voltage	230V
Frequency (Hz)	50 or 60Hz
Maximum current	45A
Maximum value measured	999999.99kWh
Power consumption	<1.3W 0.01 VA
Current terminals flexible 1×mm2	0-16mm2
RS485 cable	AWG18
another terminal flexible 1×mm2	0-2.5mm2

General Data

Pulse 1 width(ms)	80
Pulse 1 constant(imp/kWh)	10000
Pulse 2 constant(imp/kWh)	0.001/0.01/0.1/1
LED constant(imp/kWh)	10000

Dimension

Width (mm)	18
Height (mm)	104.5
Depth (mm)	88

Environmental

Operating temperature	-25°C - +55°C
Storage temperature	-40°C - +70°C



Specification

EM115



Dongle

Wi Fi / 4G



- ◆ Choose From Wi-Fi, 4G or Ethernet RJ45 Dongle options
- ◆ Flexible monitoring through IOS / Android
- ◆ IP65
- ◆ Easy configuration before install
- ◆ Real time monitoring when used with the APP
- ◆ Monitoring points every 5 minutes.

Specification

WiFi / 4G

4G Module

Port type	USB
SIM card type	Micro
Frequency range	GSM 900 - 1800 MHz
Antenna gain	3.0 dBi
Operation voltage	5 V
Operation current	400 mA
Instantaneous Max. power	< 2 W
Statics power	< 1 W

General Data

Dimension (W/H/D)	79/135/29 mm
Weight	63 g
Operation temperature	-25°C ~ +55°C
Certification	FCC/CE
Warranty	5 year

Wi-Fi Module

Wireless type	802.11.b/g/n
Frequency range	2.412GHz ~ 2.484GHz
Antenna gain	2.5 dBi
WLAN default IP	192.168.10.100
Default server URL	server.GivEnergy.cloud

Security

Security mechanism	WEP/WPA-PSK/WPA2-PSK/WAPI
Encryption	WEP64/WEP128/AES/TKIP

General Data

Max. communication distance	50m (Through one wall)
Dimension (W/H/D)	79/135/29 mm
Weight	63 g
Operation temperature	-25°C ~ +55°C
Certification	FCC/CE
Warranty	5 year




Home Systems

Operating Modes

Day time mode

The inverter will divert PV generated power into the home to assist the demand. If the PV generation is higher than the demand the excess will be stored in the battery and/or exported to grid. If the demand in the home spikes (for example turning on a kettle) and the PV generation isn't enough on its own to meet this demand the battery will discharge to assist the PV so that very little energy is imported from the grid.

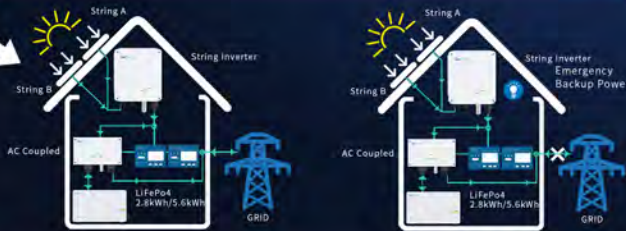


Evening mode

When the PV is not generating due to insufficient light levels the system will monitor the demand and discharge the battery at the required level to minimise imported energy and to reduce demand on the grid at peak times.

Night time (Economy 7) mode

Our systems can be set to recharge at cheap off peak rate energy to be used at peak times. This is extremely useful in Winter when there isn't as much PV production.

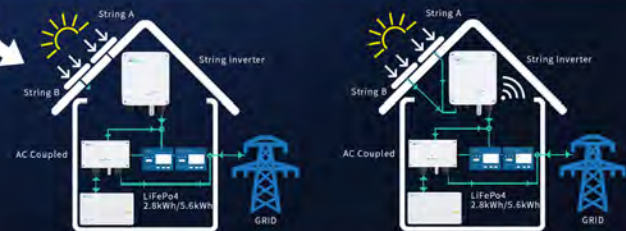

Emergency back up mode

Our systems can be installed so that if you suffer a loss of power to the home our system will automatically switch over to power your lighting and other essential circuits

Demand Side Response


There is an option in our software to allow remote data collection/ analytics. This gives vital information to utility providers and can allow a high level of indication to when demand will occur. The system can also be operated remotely via wireless communication and can allow network operators access to balance the community loads at peak times and replace at off peak times, without any user intervention.

Home Systems

Monitoring Portal




- ◆ Complete monitoring of all energy modes: Import, Export, Generation & Consumption.
- ◆ Web portal or APP access anywhere and anytime
- ◆ Real time monitoring and data with integrated smart meter
- ◆ Monitor PV array parameters
- ◆ Monitor battery information, SoC, warranted throughput
- ◆ Remote Control access for charging/discharging (DUoS, TnUoS, ToU, Off Peak)
- ◆ Remotely charge and Discharge with Simplicity

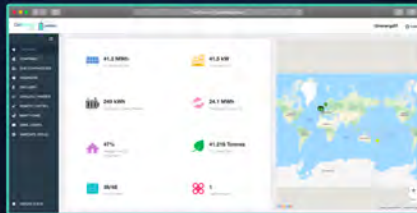


We have the control logic and monitoring platform that we believe to be the best on the market, we spend thousands of hours speaking with our clients to improve each version and allow us the greatest flexibility. This affords us the time to research and develop the best outcomes for our clients. Please feel free to look at our monitoring and control portal.

Mobile App

IOS & Android

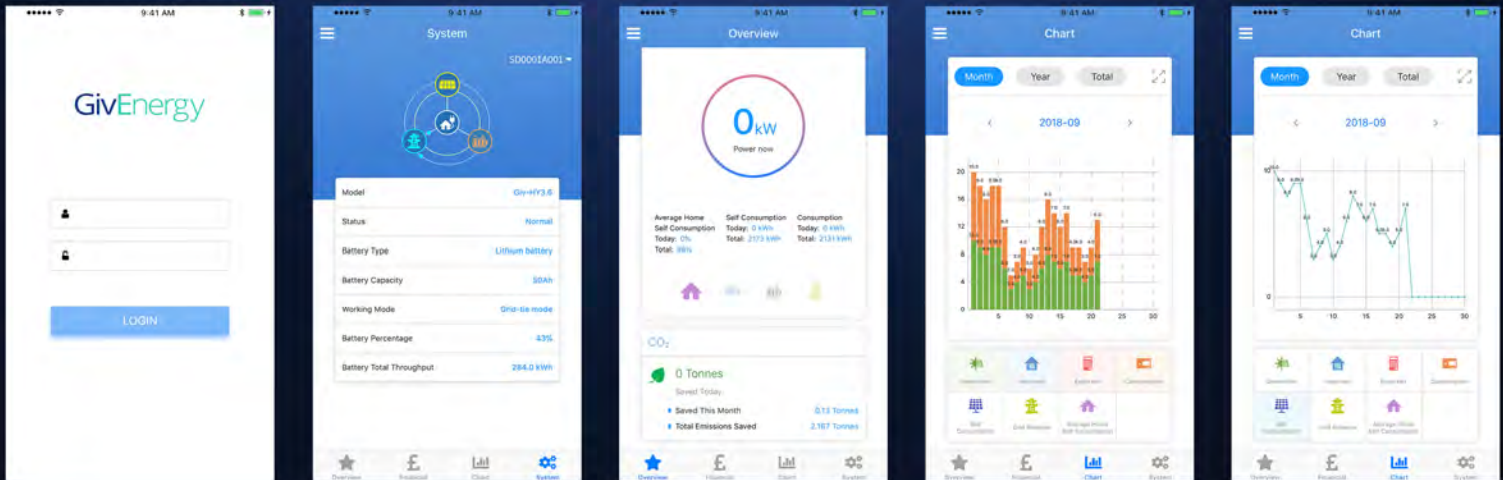


App Available to download from



GivEnergy[®]

Product Flow Diagram

www.GivEnergy.cloud

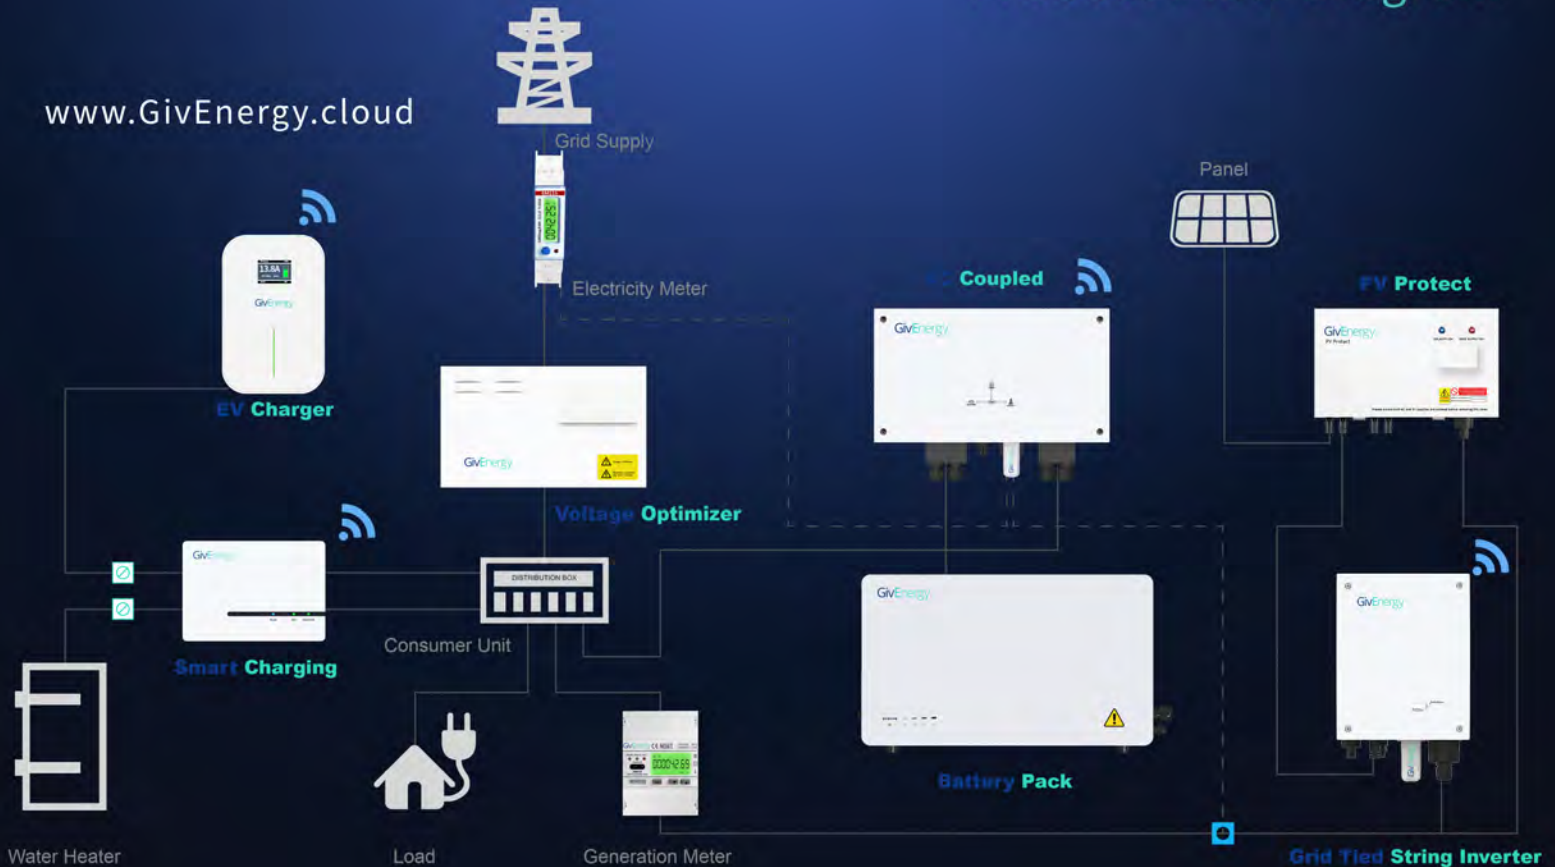

GivEnergy

Energy Storage
For
Commercial, Industrial and Grid



SME- Small to Mid Sized Enterprise Energy Storage System

64kWh / 50Kw Cabinet



- ◆ Using the latest LiFePO₄ prismatic cell technology
- ◆ Smart EMS for integration of renewables
- ◆ Up to 1C charge and discharge rate
- ◆ 3 Phase 400V Installation
- ◆ Plug & Play Battery Packs, each 9.6kWh
- ◆ Multi Layer BMS for cell management - can be used to shift peak demand (DUOS), system allowing greater control and functionality
- ◆ Remote monitoring & control
- ◆ Local control via LED screen
- ◆ Scaleable in 64kWh cabinet upto 201.6kWh
- ◆ Available in 30/50/100kW Models
- ◆ IP20

AC Specifications	GivPCS-30	GivPCS-50	GivPCS-100
-------------------	-----------	-----------	------------

Wiring Methods		Three Phase Five Wires	
Nominal Power Capacity	30kW	50kW	100kW
Maximum Power	33kVA	55kVA	110kVA
Nominal Grid Voltage		400V	
Voltage Range (Grid Tied)		400V+ 10%(settable)	
Voltage Range (Off Grid)		400V±5%	
Nominal Current	44A	72A	144A
Maximum Current	48A	79A	158A
Nominal Frequency		50Hz	
Frequency Range		47-51.5 (settable)	
THDi		<3% (Nominal Power)	
Power Factor		0.9 (Leading)-0.9 (Lagging)	

DC (Battery) Specifications	GivPCS-30	GivPCS-50	GivPCS-100
-----------------------------	-----------	-----------	------------

Nominal Power	30kW	50kW	100kW
DC Voltage Range		0V-900V	
Full Load Voltage Range		350V-850V	
Nominal Current	91A	150A	150A
Stabilized Voltage Precision		±1%	
Stabilized Current Precision		±2%	

PCS System	GivPCS-30	GivPCS-50	GivPCS-100
------------	-----------	-----------	------------

Maximum Conversion Efficiency	0.95	0.955	
Weight	490KG	600KG	850KG
Dimensions		Standard 19" 42U	
Altitude		5000 meter(Derated when>3000 meter)	
IP Grade		IP20	
Noise		<65dB	
Operating Temp Range		- 35°C~+45°C	
Storage Temp Range		- 40°C~+10°C	
Cooling Method		Forced Cooling	
Humidity		0-95%	
Communication		Enthernet, RS485, CAN2.0	

Others	GivPCS-30	GivPCS-50	GivPCS-100
--------	-----------	-----------	------------

Phase Imbalance Operating Capability		100%	
Parallel Capability		Yes	

Battery	GivPCS-30	GivPCS-50	GivPCS-100
---------	-----------	-----------	------------

Battery Pack		5.33kWh Standard 19"	
Battery Pack Voltage		51.2VDC	
Battery Rack		64kWh Standard 19" 42U	
Battery Rack Voltage		614VDC	
Rack Scaleable		Yes	

Specification

64kWh / 50kW Cabinet



Rack Mounted Battery

125kWh - 1.25MWh



- ◆ 9.6kWh packs based on 61.5Ah cells
- ◆ Modular plug and play packs
- ◆ Easy to Install
- ◆ LiFePO₄ Battery cell Technology
- ◆ Can be used to charge from Grid or Surplus Renewable generation i.e solar, wind, hydro
- ◆ Built in multi layer BMS for precise cell monitoring and balancing
- ◆ Intergrated EMS allows multiple monitoring points
- ◆ 0.5c - 1c charge / discharge rate
- ◆ Modular packs, Modular racks for desired capacity
- ◆ Full monitoring and control through GivEnergy.Cloud



GivEnergy®

Specification

Rack Mounted Batteries

Battery Rack

Nominal Voltage	665V
Maximum Charge Voltage	759V
Cut-off Discharge Voltage	600V
Nominal Current	165A
Energy	125kWh
Power	109.8kW
Dimensions	800*600*2140mm
BMS	Robust multi point monitoring BMS pre installed
Life cycling (80% DOD, 25°C)	10years
Operation temperature	-20°C~55°C
Storage Temperature	-30°C~60°C
Standard	UN 38.3, IEC61000

Per Rack

61.5Ah

1,	125kWh
2,	250kWh
3,	375kWh
4,	500kWh
5,	625kWh
6,	750kWh
7,	875kWh
8,	1000kWh
9,	1125kWh
10,	1250kWh



For Larger rack mounted systems, please contact Technical@givenergy.co.uk

External Access Container

Energy Storage System



- ◆ Bridge Power Gaps in Generation
- ◆ Modular 72kWh Battery Packs
- ◆ Backup Power for Grid Upgrades and Planned Maintenance
- ◆ Peak shaving and load shifting
- ◆ PF Regulation and Voltage Support
- ◆ Time of use ready
- ◆ DUoS Avoidance - Green, Amber, Red rates
- ◆ TnUoS- Triad Avoidance
- ◆ UPS (Optional)
- ◆ Easy installation - External rack mounted
- ◆ Integrated G99 Relay Control Panel
- ◆ 400V/11kV/33kV Connections
- ◆ Perfect for Grid Balancing Mechanisms

External Access Container

Energy Storage System

Battery Cell LiFePO₄

Capacity	61.5Ah
Voltage	3.2V
Charging method	Constant current + voltage
Temperature	
Charging	0°C~45°C
Discharging	-20°C~50°C
Short time	
Discharging/30min	-20°C~55°C
Storage	20°C~40°C
Transportation	-40°C~50°C
Weight	1.15±0.01kg
Energy Density	157/170±10Wh/Kg
Maximum Charging	2C charging
Discharging rate	3C discharging
Resistance	0.65mΩ ±5%

Battery Pack

Cell	48 pcs
Connection Method	3P16S
BMU	1pcs
Nominal Voltage	51.2VDC
Voltage Range	32.0-58.4VDC
Capacity	165Ah(185Ah)
Energy	72kWh
Maximum Continuous Discharge Power	72kW
Nominal charge current	330A
Charge Method	CV/CC/CP
Cut-off Voltage	58.4VDC
Cut-off Current	8.25A
Rated Discharge Current	165A
Standard Discharge Method	CC
Temperature Working Range	0°C~40°C




Terminal Support Unit

Energy Storage System






- ◆ Bridge Power Gaps in Generation
- ◆ Backup Power for Grid Upgrades and Planned Maintenance
- ◆ Peak shaving and load shifting
- ◆ PF Regulation and Voltage Support
- ◆ Time of use ready
- ◆ DUoS- Green, Amber, Red rates
- ◆ TnUoS- Triad Avoidance
- ◆ Integrated G99 Relay Control Panel
- ◆ 400V/11kV/33kV Connections
- ◆ Perfect for Grid Balancing Mechanisms
- ◆ UPS (Optional)

- ① Battery Pack
- ② Power Conversion System
- ③ Central Control and Environment Monitoring
- ④ Fire Suppression Equipment
- ⑤ Industrial Air Conditioning

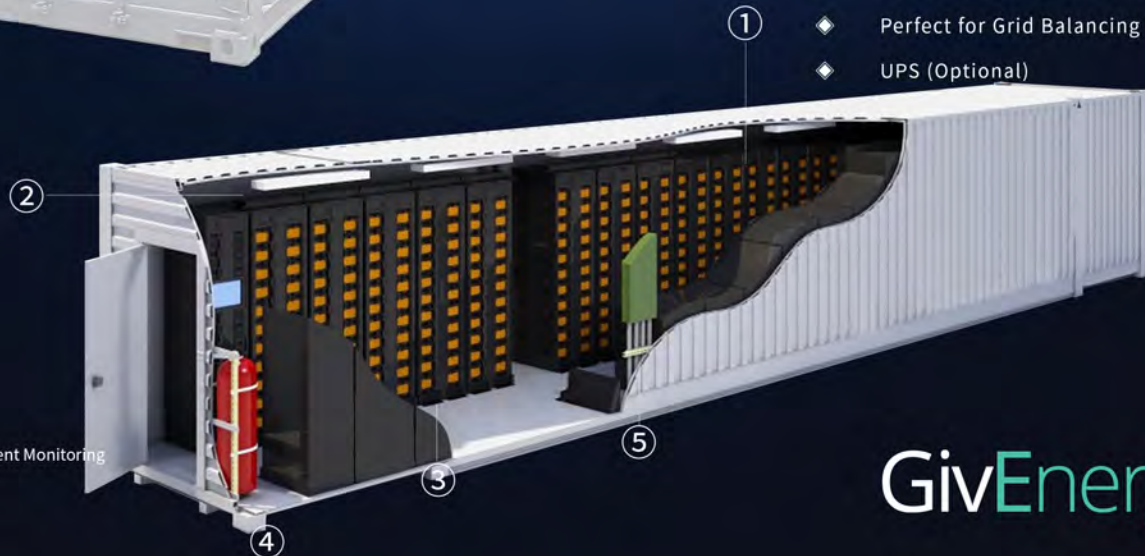


10ft Container ESS

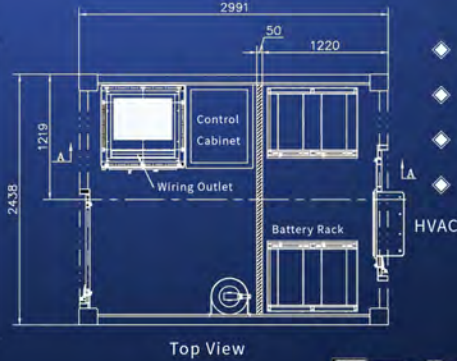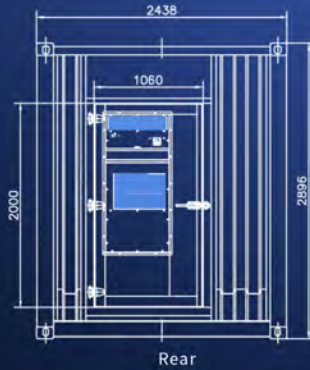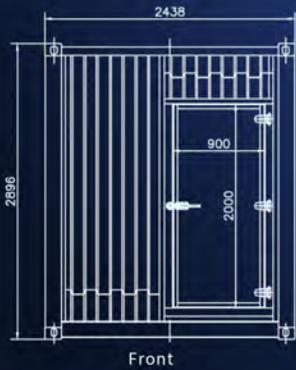


- ◆ Fire Suppression system
- ◆ Full HVAC System Install
- ◆ BMS-Building Management System
- ◆ Fully customizable to your requirements



Integration

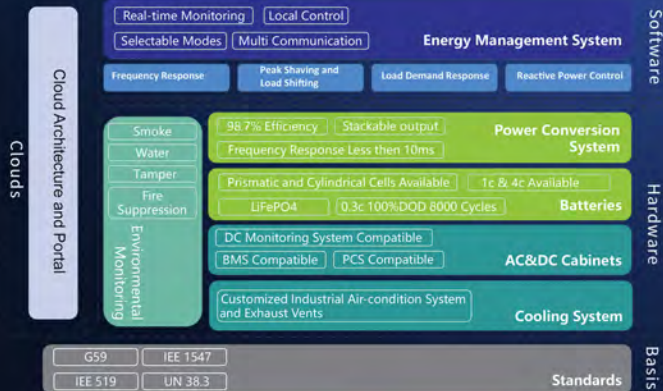

Energy Storage System Applications

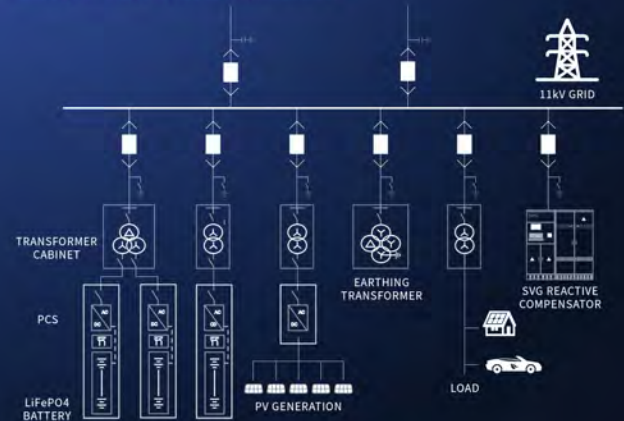

Commercial Battery Cells, Packs and Racks

Battery Cell LiFePO₄

Capacity	61.5Ah
Voltage	3.2V
Charging method	Constant current + voltage
Temperature	
Charging	0°C~45°C
Discharging	-20°C~50°C
Short time	
Discharging/30min	-20°C~55°C
Storage	20°C~40°C
Transportation	-40°C~50°C
Weight	1.15±0.01kg
Energy Density	157/170±10Wh/Kg
Maximum Charging	2C charging
Discharging rate	3C discharging
Resistance	0.65mΩ ±5%

Battery Pack

Cell	48 pcs
Connection Method	3P16S
BMU	1pcs
Nominal Voltage	51.2VDC
Voltage Range	32.0-58.4VDC
Capacity	165Ah(185Ah)
Energy	9.6kWh
Maximum Continuous Discharge Power	16.9KW
Nominal charge current	330A
Charge Method	CV/CC/CP
Cut-off Voltage	58.4Vdc
Cut-off Current	8.25A
Rated Discharge Current	165A
Standard Discharge Method	CC
Temperature Working Range	0°C~40°C
Weight	75kg

Battery Rack

Nominal Voltage	665V
Maximum Charge Voltage	759V
Cut-off Discharge Voltage	600V
Nominal Current	165A
Energy	125kWh
Power	125kW
Dimensions	800*600*2140mm



GivEnergy®

Commercial OEM Installations



PCS Cabinet
BMS Cabinet



BMS Display




Fire Suppression




Battery Rack



HVAC

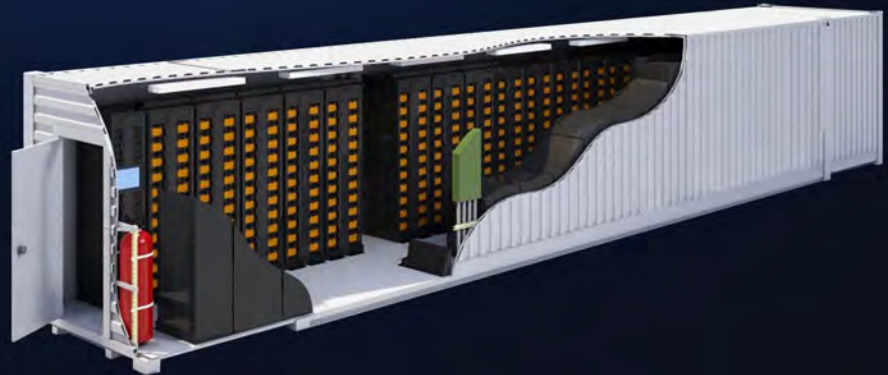


20' Container Solution

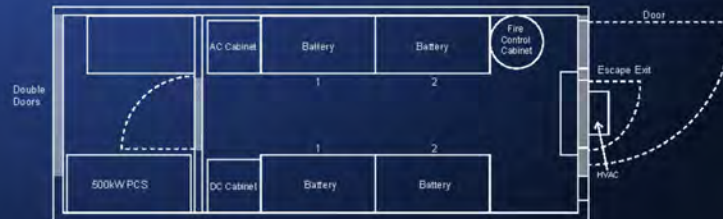

Standard 20' Container Solution
19.9x8.0x9.5 feet
100kW / 436kWh or 250kW / 763kWh



40' Container Solution

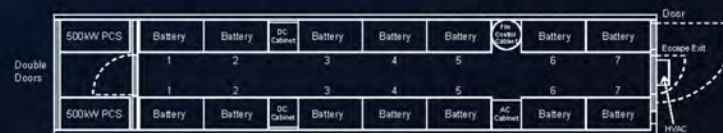

Standard 40' Container Solution
40x8.0x9.5 feet
1MW / 1MWh or 1MW / 2MWh

Bi-Directional PCS

Hardware

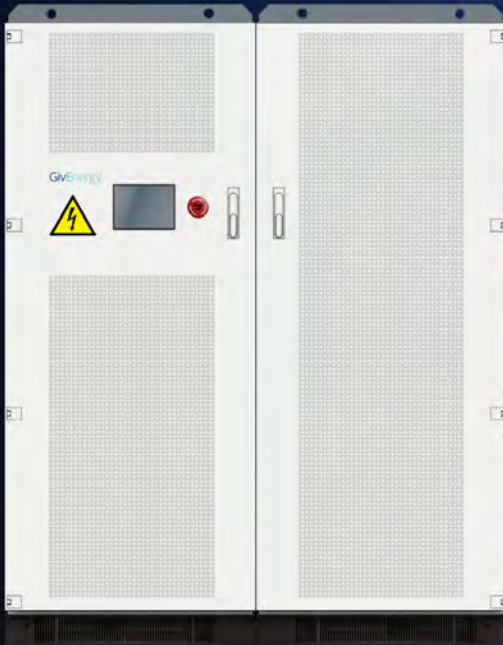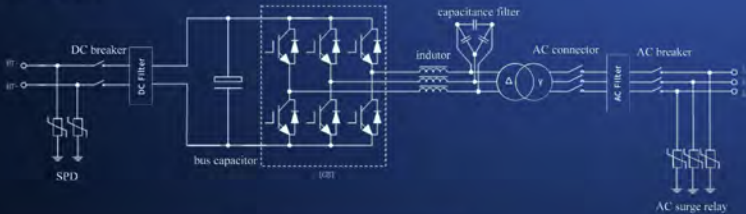

- ◆ Hybrid design, on-grid, off-grid and energy storage function combined
- ◆ Bidirectional conversion available
- ◆ Autonomous energy management system
- ◆ Intelligent charging function
- ◆ Multi source renewable integration
- ◆ Black start-up compatibility
- ◆ Autonomous phase balancing
- ◆ Online seamless handover between on-grid and off-grid modes.
- ◆ Active and reactive power control (instantly)
- ◆ Support various loads type, independently or mixed
- ◆ Comprehensive and high precision operation and fault monitoring and recording
- ◆ Can be remotely controlled via RS485
- ◆ Can be integrated into existing building management systems.
- ◆ Remote monitoring Via Givenergy.cloud

Model	GivPCS-100	GivPCS-250	GivPCS-500
AC connection method	Three-phase three-wire	Three-phase three-wire	Three-phase three-wire
Parameters in battery side			
Rated power	100kW	250kW	500kW
DC voltage range	500V~900V	500V~900V	500V~900V
DC voltage range of full power	500V~850V	500V~850V	580V~850V
Rated running current	207A	517A	880A
Voltage stabilizing accuracy	≤1%	≤1%	≤1%
Current stabilizing accuracy	≤2%	≤2%	≤2%

Parameters in battery side			
Rated power	100kW	250kW	500kW
Max capacity Rated	110kVA	275kVA	550kVA
grid voltage	400V	400V	400V
Voltage range (gird-connected)	400V+10%(Adjustable)	400V+10%(Adjustable)	400V+10%(Adjustable)
Voltage range(off gird)	400V±5%	400V±5%	400V±5%
Rated current	145A	362A	721A
Max running current	159A	398A	794A
Rated grid frequency		50HZ	
Frequency range		47-51.5 (Adjustable)	
THDv		<3% (rated power)	
Power factor		0.9(lead)-0.9(lagging)	

Protection	GivPCS-100	GivPCS-250	GivPCS-500
Low voltage ride through		Yes	
Anti-islanding mode		Yes (support planned Island)	
AC over current/short circuit protection		Yes	
AC over voltage/under voltage protection		Yes	
AC over frequency/under frequency protection		Yes	
Phase sequence fault protection		Yes	
DC over current/short circuit protection		Yes	
DC over voltage/under voltage protection		Yes	
DC reverse polarity protection		Yes	
Over temperature protection		Yes	
Insulation protection		Yes	
Power module(IGBT) protection		Yes	

System			
Max conversion efficiency	0.97	0.97	0.987
Dimension(W*H*D)	807mm*1976mm*860mm	1010mm*1976mm*650mm	1406mm*1976mm*650mm
Weight	930kg	940kg	950kg
Altitude		5000m	
Protective class		IP23	
Noise		<65dB	
Operating temperature		-35°C~+45°C	
Storage Temperature		-40°C~+70°C	
Cooling		Forced Air cooling	
Relative humidity		0-95%, Non- condensing	
Communication		Ethernet、RS485、CAN2.0, Modbus, Bacnet	

Introduction

The Battery Management System (BMS) comprises of the following items:

(BMU) Battery Module Monitoring Unit. This is used to monitor each 9.6kWh pack and monitors the cell voltages and temperatures of each cell within the pack.

(BCMS) Battery Cluster Management Unit. This is used to monitor all 8.448kWh packs within a rack. This also monitors Pack voltages, Pack Temperatures and monitors SoC of each pack when charging and discharging.

(DMU) DC Monitoring Unit. This monitors the central DC BUS and controls the upper and lower voltage limits of the battery pack.

(BAMS) Battery Rack Automatic Management System. This is the Heart of the control system and is used to read all battery packs in regards to voltages, currents, SoC. This unit also control the charge and discharge rates of the battery packs, manages pack voltages and temperatures and adjusts safety/grid parameters accordingly.



BAMS


Production

- ◆ SoC high protection
- ◆ SoC low protection
- ◆ Rack overvoltage protection
- ◆ Rack undervoltage protection
- ◆ Rack overcurrent protection
- ◆ Single cell overvoltage protection
- ◆ Single cell undervoltage protection
- ◆ Single cell overcurrent protection
- ◆ Single cell over temperature protection
- ◆ Single cell low temperature protection
- ◆ Short circuit protection
- ◆ Fire protection

Specification

Master BMS	
Name	Specifications
Voltage Range	18~32V
Cell Voltage	0~5V
Cell Voltage Error Range	$\leq \pm 3\text{mV}$
Voltage and Tep Acquisition Cycle	$\leq 5\text{ms}$
Current Acquisition Range	$\leq 300\text{A}$
Current Acquisition Error	$\leq \pm 1\%$
Current Acquisition Cycle	$\leq 1\text{ms}$
Temperature Acquisition Error	$\leq \pm 1^\circ\text{C}$
Temperature Acquisition Range	-20~60°C
Battery Balanced Current	2A
Communication with PCS	CAN
Communication with EMS	Ethernet
History Event Memory	≥ 100000 packet
History Store Memory	≥ 90 day

Communication

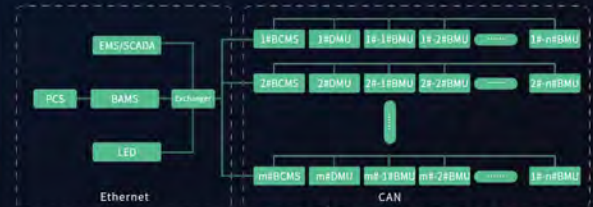

Our Additional Services

Site Survey

We offer a comprehensive site survey at the start of any commercial project to ascertain specific requirements to put together an accurate proposal.

Installation

We offer full training and support on all of our products to our certified installer network. This in turn enables us to make sure that our products are fitted in accordance with BS 7671:2018 and to our requirements to validate the manufacturer warranty.

Web Portal

Our bespoke, easy-to-use monitoring portal has different layers of access. As an end user you can monitor what your system is doing and see how much you are saving. As an Approved installer you will have 24hr access to givernergy.cloud in order to manage your complete portfolio and perform remote system checks.

Support / After care

Our UK-based Technical support team will ensure you are never more than a phone call away from all the support you need



Our Installations around the world



OEM UK Installation



OEM Australian Installation



OEM Thailand Installation



OEM New Zealand Installation

GivEnergy are looking for worldwide distributors, please contact Carl at carl.pote@givenergy.co.uk if you are interested in distribution outside of the UK

OEM UK Installation

Recent Installs



AC Coupled + 2.6kWh Battery



AC Coupled + 2x2.6kWh ECO Battery

The product images shown may represent the range of product, or be for illustration purposes only and its content is copyright of GivEnergy 2020. All rights reserved.
Any redistribution or reproduction of part or all of the contents in any form is prohibited.
You may not, except with our express written permission, distribute or commercially exploit the content. Nor may you transmit it or store it in any other website or other form of electronic retrieval system.
We recommend that customers unfamiliar with the products please contact our sales department.

OEM UK Installation

Recent Installs



5kWh Hybrid Inverter
3x2.6kWh ECO Battery

The product images shown may represent the range of product, or be for illustration purposes only and its content is copyright of GivEnergy 2020. All rights reserved.

Any redistribution or reproduction of part or all of the contents in any form is prohibited.

You may not, except with our express written permission, distribute or commercially exploit the content. Nor may you transmit it or store it in any other website or other form of electronic retrieval system.

We recommend that customers unfamiliar with the products please contact our sales department.

GivEnergy®

OEM UK Installation

Recent Installs



2 x 5kWh Hybrid Inverter
2 x 6.3kWh Battery



5kWh Hybrid Inverter
2.6kWh ECO Battery

The product images shown may represent the range of product, or be for illustration purposes only and its content is copyright of GivEnergy 2020. All rights reserved.

Any redistribution or reproduction of part or all of the contents in any form is prohibited.

You may not, except with our express written permission, distribute or commercially exploit the content. Nor may you transmit it or store it in any other website or other form of electronic retrieval system.

We recommend that customers unfamiliar with the products please contact our sales department.

GivEnergy[®]

About Our Company

GivEnergy is a manufacturer of electronic equipment designed to manage energy use and production. We specialise in our range of inverters and battery systems which have been developed to negate the need for costly infrastructure upgrades in Low Voltage areas.

Our systems use intelligent algorithms to peak shave and make the most of ToU and Economy 7 tariffs as well as storing excess-generated power from solar, wind etc to maximise self consumption.





UK Office (Yorkshire, UK)

Unit 5 Tower House Lane Ind Est,
Tower House Lane,
Hedon Road, HULL
HU12 8EE,
United Kingdom.

Phone: +44 01377 252874

Email: info@givenergy.co.uk

(Staffordshire)

Unit C4,
Dewsbury Road,
Fenton Industrial Estate,
Stoke-on-trent,
Staffordshire,
ST4 2TE

GivEnergy®