



Holdsworth Design Practice Ltd.
Chestnut House, 3 The Woodlands, Hayton,
Carlisle,
Cumbria. CA8 9HZ.
07769700912



PARTFIELD PARK

LIGHT PRODUCT INFORMATION AND

DATA SHEETS

Registered Office: 3 The Woodlands, Hayton, Brampton. CA8 9HZ.
Registered No 6707020. VAT No. 998 3341 67
Directors: AJ Holdsworth, JL Holdsworth


Kit Clic Post 40 H1000

LU14805B

Lombardo.

Technical information:

Installation:	Ground
Material:	Polycarbonate
Finish:	Black RAL 9005
Diffuser type:	Polycarbonate
Lamp type:	Lamp
Photobiological risk:	RG0
Type of bulb socket:	GU10
Lamp max:	1x7
Insulation class:	□ CL.II
Type of protection:	IP 65
Resistance to breakage:	IK 06 1J xx3
Standards and Marks of Conformity:	CE ^{UK} _{EA}



GU10 version: light bulb not included. Kit consisting of Clic Post, Forty Pole with top cap and Forty Post fixing base.

Kit Clic Post 40 H1000

LU14805B

Lombardo.



Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it


lombardo.it

Kit Clic Post 40 H1000


LU14805B

Lombardo.

Lighting simulation:

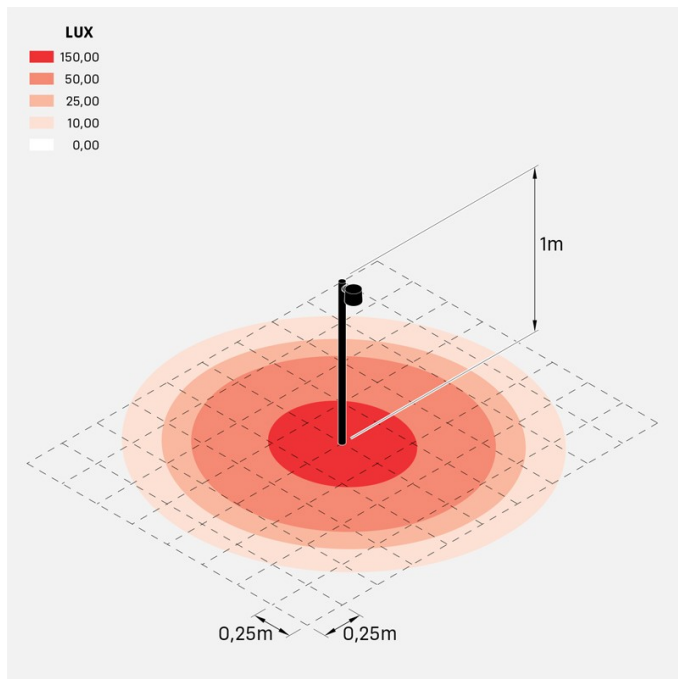

clic_kit_post40_H1000



Technical information:


Installation:	Wall
Material:	Polycarbonate
Finish:	Black RAL 9005
Diffuser type:	Polycarbonate
Lamp type:	Lamp
Photobiological risk:	RG0
Type of bulb socket:	GU10
Lamp max:	1x7
Insulation class:	□ CL.II
Type of protection:	IP 65
Resistance to breakage:	IK 06 1J xx3
Standards and Marks of Conformity:	CE ^{UK} _{EA}

GU10 version: light bulb not included.



Clic Wall

LU14802B


Lombardo.

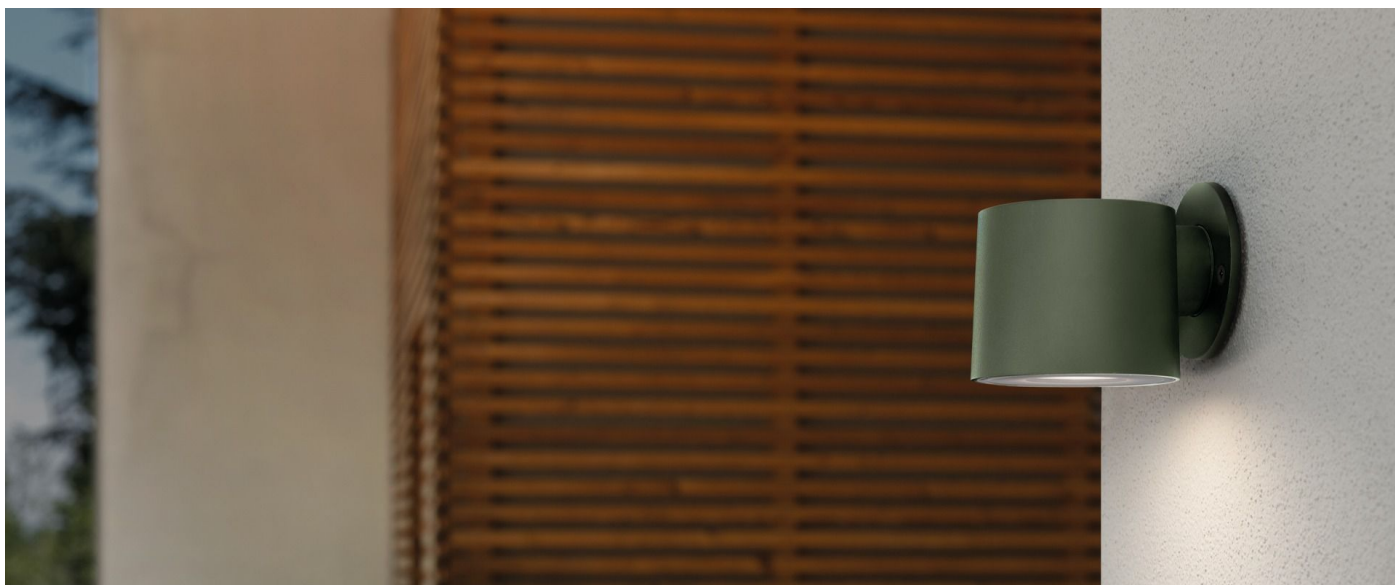

Installation images:



Lighting simulation:

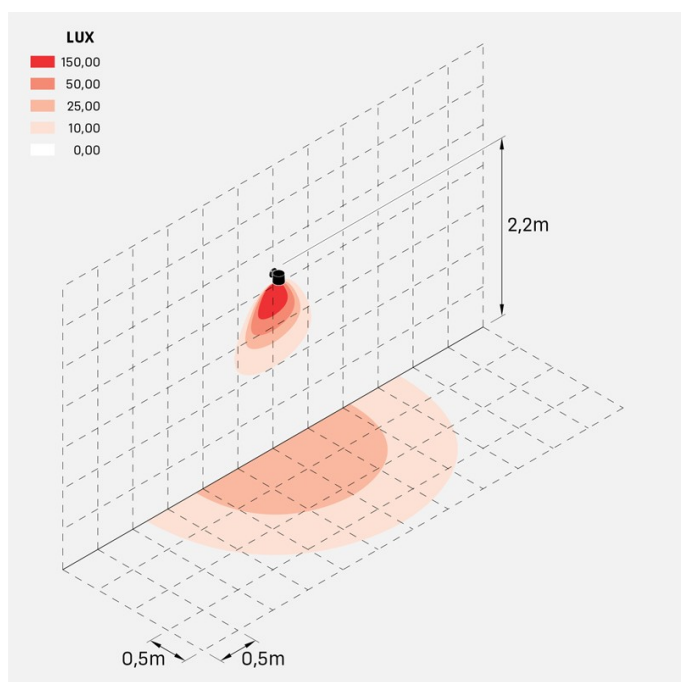


clic_wall

Tape 140

LL14502B2


Lombardo.



Technical information:

Installation:	Wall
Material:	Aluminium
Finish:	Black RAL 9005
Treatment:	Sea Treatment
Diffuser type:	Frosted glass
Lamp type:	LED
Energy performance class:	E
Colour temperature:	2700K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG0
Power consumption (Watt):	4
Lumen:	590
Real Lumen:	419
Power supply:	⊗ not included
LED:	24V
Insulation class:	⚡ CL.III
Type of protection:	IP 66
Resistance to breakage:	IK 06 1J xx3
Standards and Marks of Conformity:	CE UK CA


Codes LL14512: Kit consisting of Tape 140 + LB1070068 (driver IP66) Codes LL14522: Kit consisting of Tape 140 + recess box 503 LB11660 + LB1070068 (driver IP66)





Tape 140

LL14502B2

Lombardo.

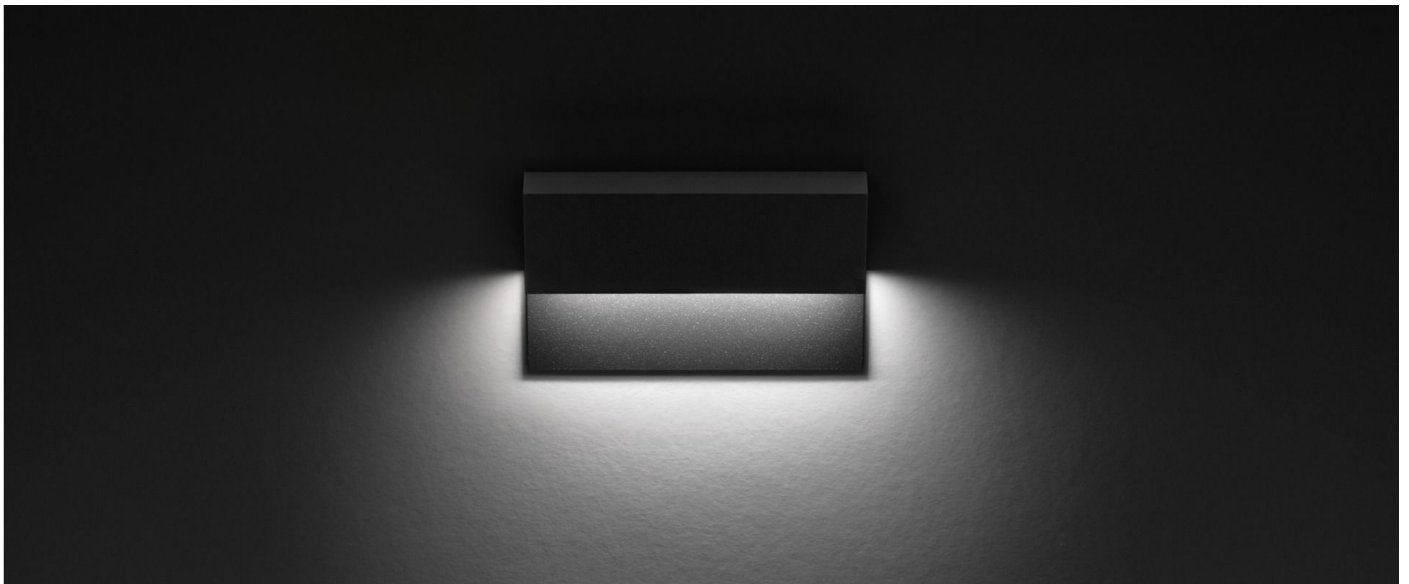

Installation images:




Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it


lombardo.it


Lighting simulation:

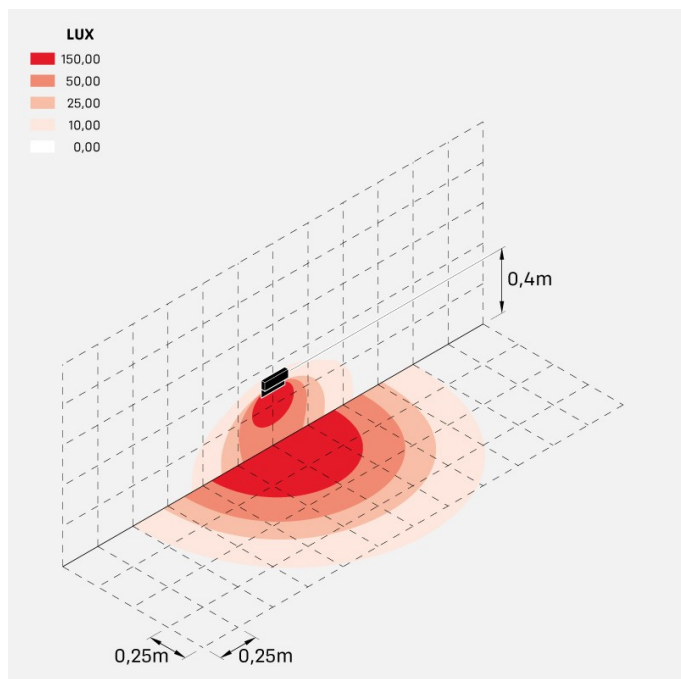

tape_140

Photometric curves:

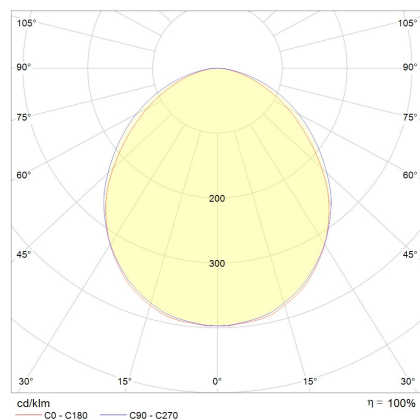




Technical information:

Installation:	Post Ø60
Material:	Aluminium
Finish:	Black RAL 9005
Treatment:	Sea Treatment
Diffuser type:	Transparent glass
Lamp type:	LED
Energy performance class:	D
Colour temperature:	2700K
CRI:	>80
LB Factor:	LM90B10 - 60.000
Photobiological risk:	RG1
Power consumption (Watt):	26
Lumen:	4000
Real Lumen:	3000
Power supply:	✓ integrated
LED:	220-240 V
Insulation class:	□ CL.II
Type of protection:	IP 65
Resistance to breakage:	IK 08 5J xx7
Standards and Marks of Conformity:	CE UK CA
Dimming	DALI2
Operating temperature:	-20°C / +30°C


Recommended for installation on Ø 60 metal poles. Not suitable for Still poles. Cable ON-OFF version: 1m H05RN-F 2x1. Cable DALI version: 1m H07RN-F 4x1.



Time 180

LM155180B2

Lombardo.

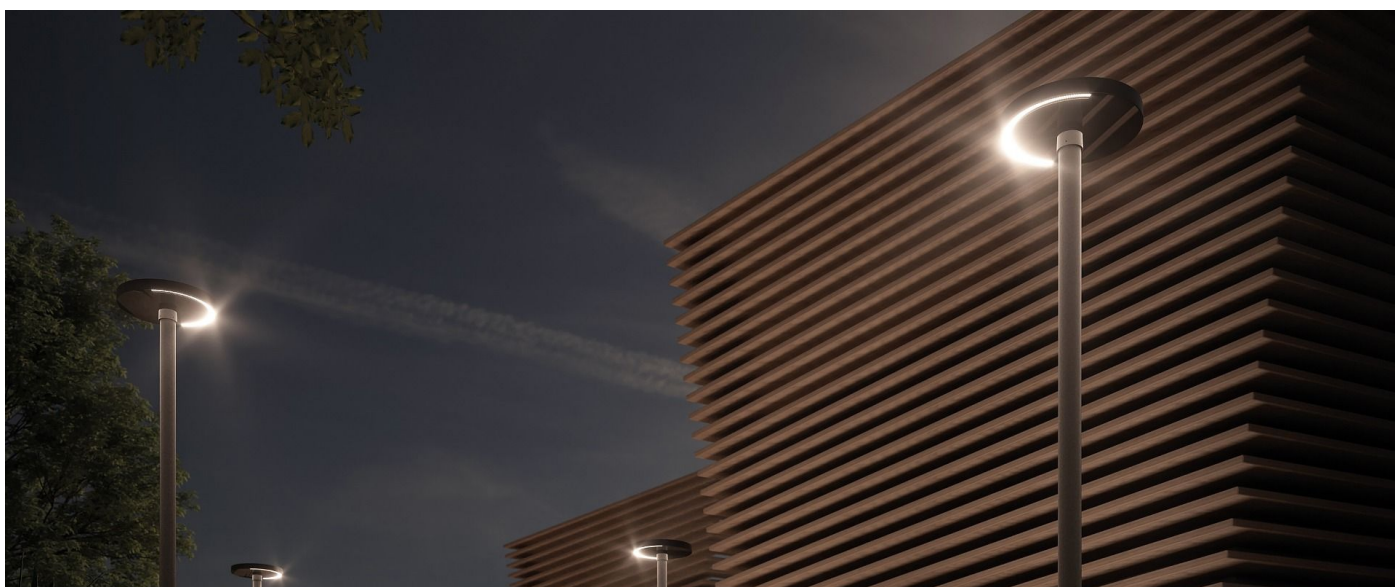


Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it


lombardo.it

Lighting simulation:

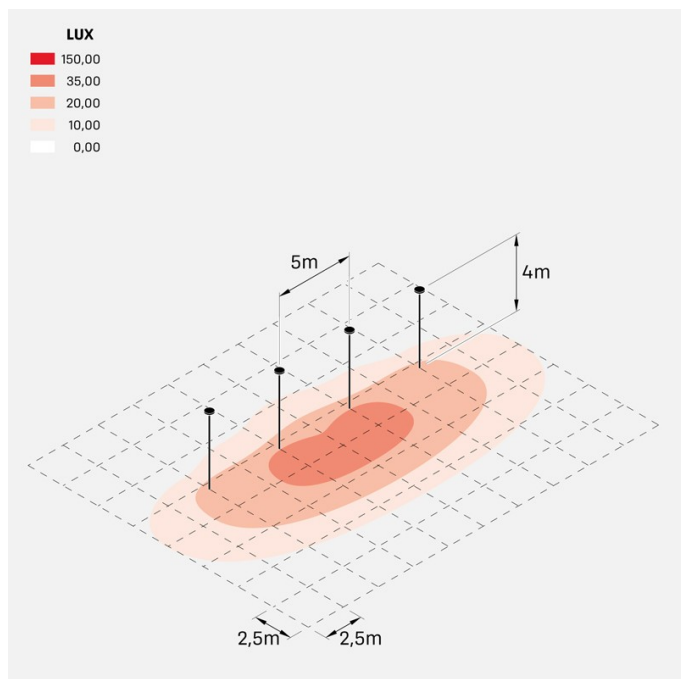

Time_180_26W


Photometric curves:

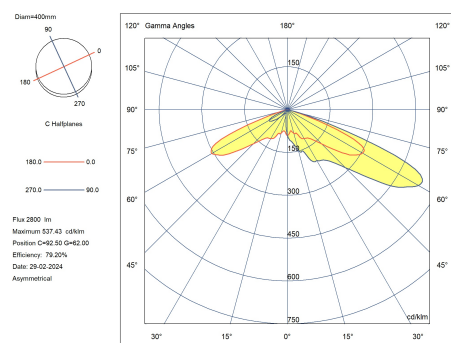

Koi 220

LL1210242

Lombardo.




Technical information:

Installation:	Wall
Material:	Aluminium
Finish:	Black RAL 9005
Diffuser type:	Frosted glass
Lamp type:	LED
Energy performance class:	E
Colour temperature:	2700K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG0
Power consumption (Watt):	10
Lumen:	1300
Real Lumen:	650
Power supply:	✓ integrated
LED:	220-240 V
Circuit breaker	44-56-65-82
B10 - C10 - B16 - C16	
Insulation class:	⊕ CL.I
Type of protection:	IP 66
Resistance to breakage:	IK 10 20J xx9
Standards and Marks of Conformity:	CE UK CA

BORDO MARE: add S to the end of the selected code including LED colour to have the product supplied with sea treatment against salt spray.

All parts in direct contact with the soil must never be covered by the soil itself or come into contact with aggressive chemicals (e.g. fertilisers, herbicides, pool and/or floor cleaning products, etc.). Clean parts covered with soil build-up or cement dust periodically. Outdoor products must be installed with the appropriate plastic accessories. They must not be installed directly on the ground or directly on concrete because contact between the two materials can create accelerated oxidation of the device.



Koi 220

LL1210242

Lombardo.



Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it


lombardo.it

Koi 220

LL1210242

Lombardo.

Lighting simulation:

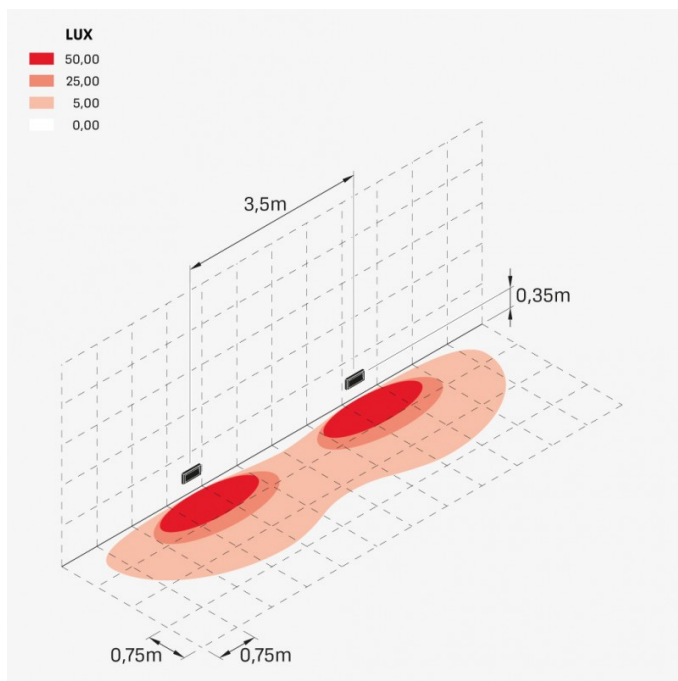


koi_220

Trend Flat 200

LL1120232


Lombardo.



Technical information:

Installation:	Wall
Material:	Aluminium
Finish:	Black RAL 9005
Diffuser type:	Polycarbonate
Lamp type:	LED
Colour temperature:	2700K
CRI:	>80
Photobiological risk:	RG0
Power consumption (Watt):	11
Lumen:	1400
Real Lumen:	830
Power supply:	✓ integrated
LED:	220-240 V
Insulation class:	⊕ CL.I
Type of protection:	IP 55
Resistance to breakage:	IK 10 20J xx9
Standards and Marks of Conformity:	CE UK CA

BORDO MARE: add S to the end of the selected code including LED colour to have the product supplied with sea treatment against salt spray.




Trend Flat 200

LL1120232

Lombardo.

Lighting simulation:

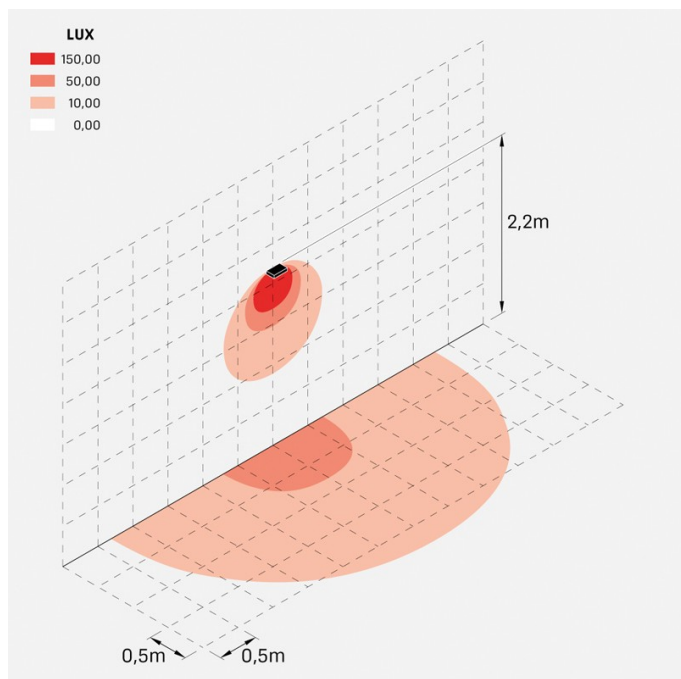

trend_200_11w