


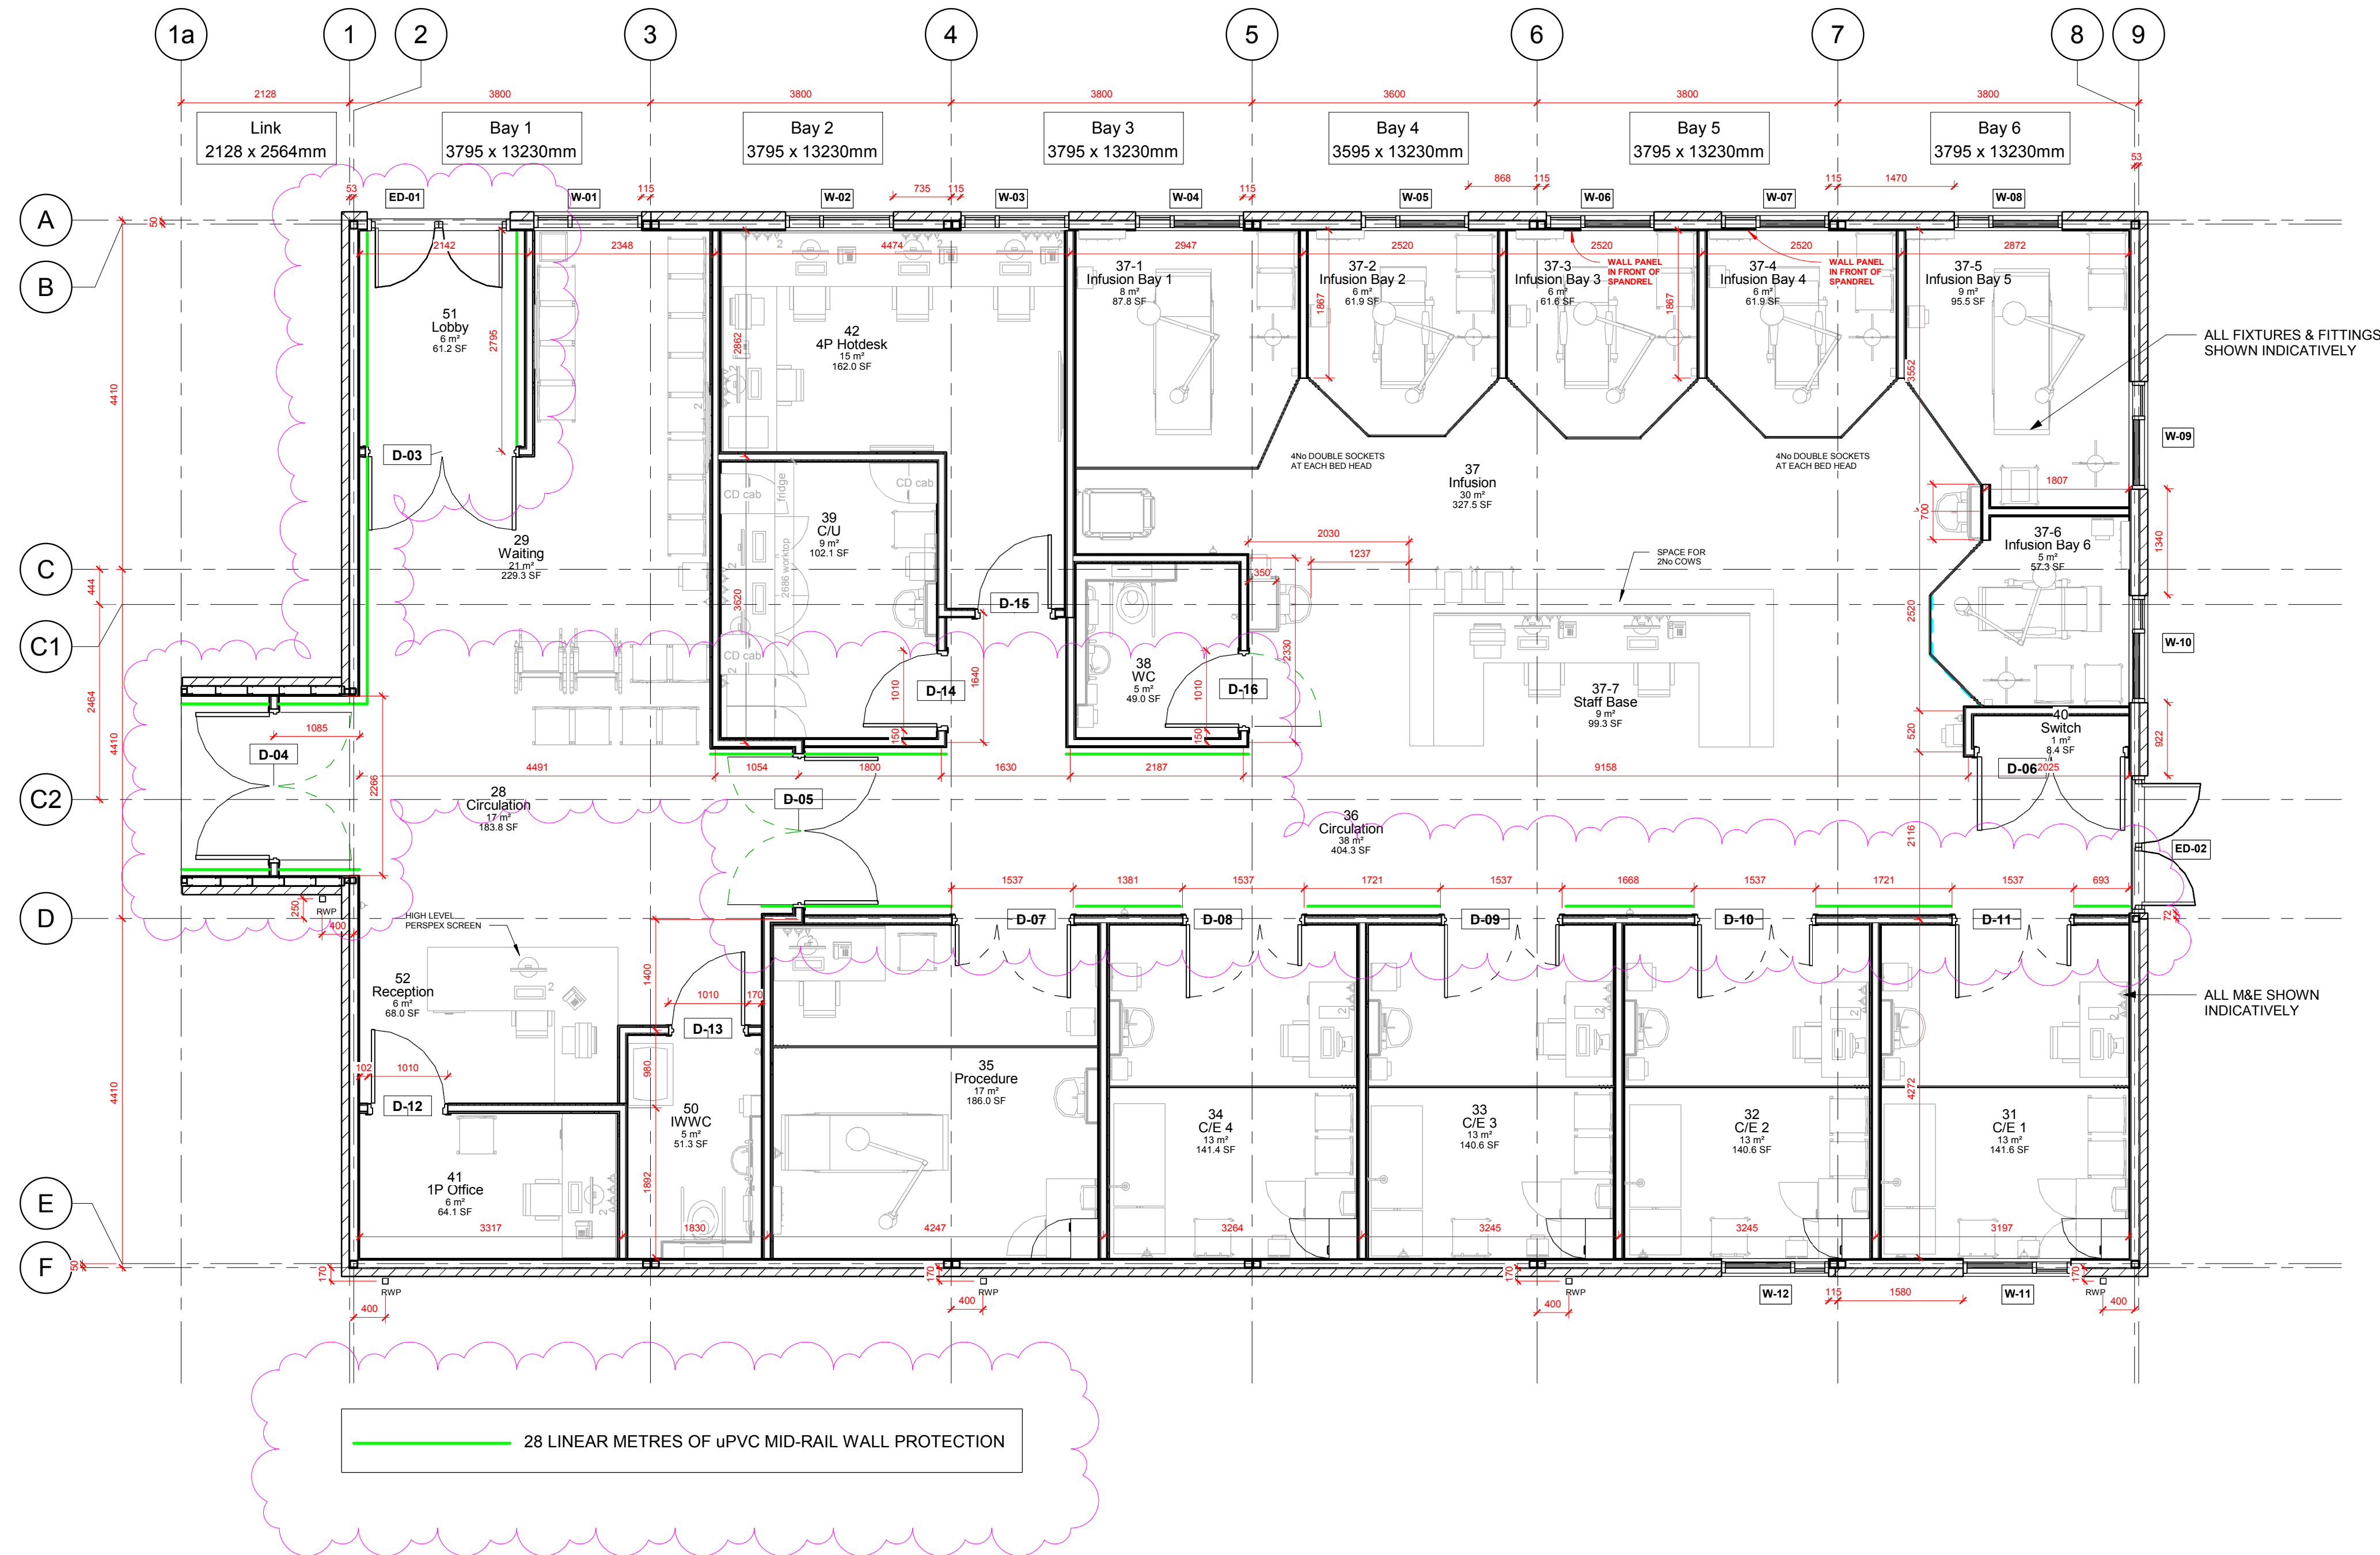

Level 00 - Room Schedule		
Number	Name	Area
28	Circulation	17.1 m²
29	Waiting	21.3 m²
31	C/E 1	13.2 m²
32	C/E 2	13.1 m²
33	C/E 3	13.1 m²
34	C/E 4	13.1 m²
35	Procedure	17.3 m²
36	Circulation	37.6 m²
37	Infusion	30.4 m²
37-1	Infusion Bay 1	8.2 m²
37-2	Infusion Bay 2	5.7 m²
37-3	Infusion Bay 3	5.7 m²
37-4	Infusion Bay 4	5.7 m²
37-5	Infusion Bay 5	8.9 m²
37-6	Infusion Bay 6	5.3 m²
37-7	Staff Base	9.2 m²
38	WC	4.6 m²
39	C/U	9.5 m²
40	Switch	0.8 m²
41	1P Office	6.0 m²
42	4P Hotdesk	15.1 m²
50	IWVC	4.8 m²
51	Lobby	5.7 m²
52	Reception	6.3 m²
		277.5 m²

THIS DRAWING AND DESIGN IS THE SOLE PROPERTY OF PREMIER MODULAR LIMITED AND MUST NOT BE COPIED, LOANED OR COMMUNICATED, IN WHOLE OR PART TO ANY THIRD PARTY WITHOUT CONSENT FROM THE COMPANY.

☐ A Fabrication, manufacture or construction may proceed in accordance with this document/drawing.

☐ B Fabrication, manufacture or construction may proceed subject to incorporation of the amendments noted hereon.

☒ C This document/drawing shall be modified in accordance with amendments noted hereon and RESUBMITTED for further inspection prior to manufacture and construction.

Notes

Rev	By	Description	Date
C7	AMW	MID-RAIL WALL PROTECTION ADDED. DOOR ED-01 FLIPPED TO OPEN INWARDS.	04.03.21
D8	AMW	RWP SETTING-OUT DATA ADDED.	03.03.21
C5	AMW	INTERNAL DOOR TYPE 1 REVISED TO SUIT SUPPLIER.	03.03.21
G4	AMW	DOOR D-04 FLIPPED - CLIENT REQUEST	01.03.21
C3	AMW	CLEAN UTILITY LAYOUT REVISED.	26.02.21
C2	AMW	SWITCH ROOM ENLARGED & DOORSET D-06 WIDENED.	02.02.21
C1	AMW	CONSTRUCTION ISSUE.	05.01.21
IN	TC	IPS REVISED TO SUIT DRAINAGE.	17.12.20
P3	AMW	EXTERNAL DOORS & WINDOWS REVISED AS CLIENT REQUEST.	23.11.20
P2	AMW	REVISED TO CLIENT COMMENTS.	05.11.20
P1	AMW	PROVISIONAL ISSUE.	26.10.20

Premier
MODULAR EXCELLENCE

HEAD OFFICE
PREMIER MODULAR LIMITED, CATFOSS LANE,
BRANDESBURTON, DRIFFIELD
EAST YORKSHIRE YO25 8EJ
Telephone: (01964) 545000 Fax: (01964) 545001
email: sales@premiermodular.co.uk
internet: www.premiermodular.co.uk

We are
WACO
MEMBER

Status	CONSTRUCTION		
Client	WEST CUMBRIA NHS TRUST		
Project	WEST CUMBRIA HOSPITAL E.D.		
Title	GA Plan		
Scale	Drawn	Date:	Checked
1 : 50	AMW	29.10.2020.	TC
Drawing No.	31815- PML-B1-00-DR-A-0001		Rev
		C7	