


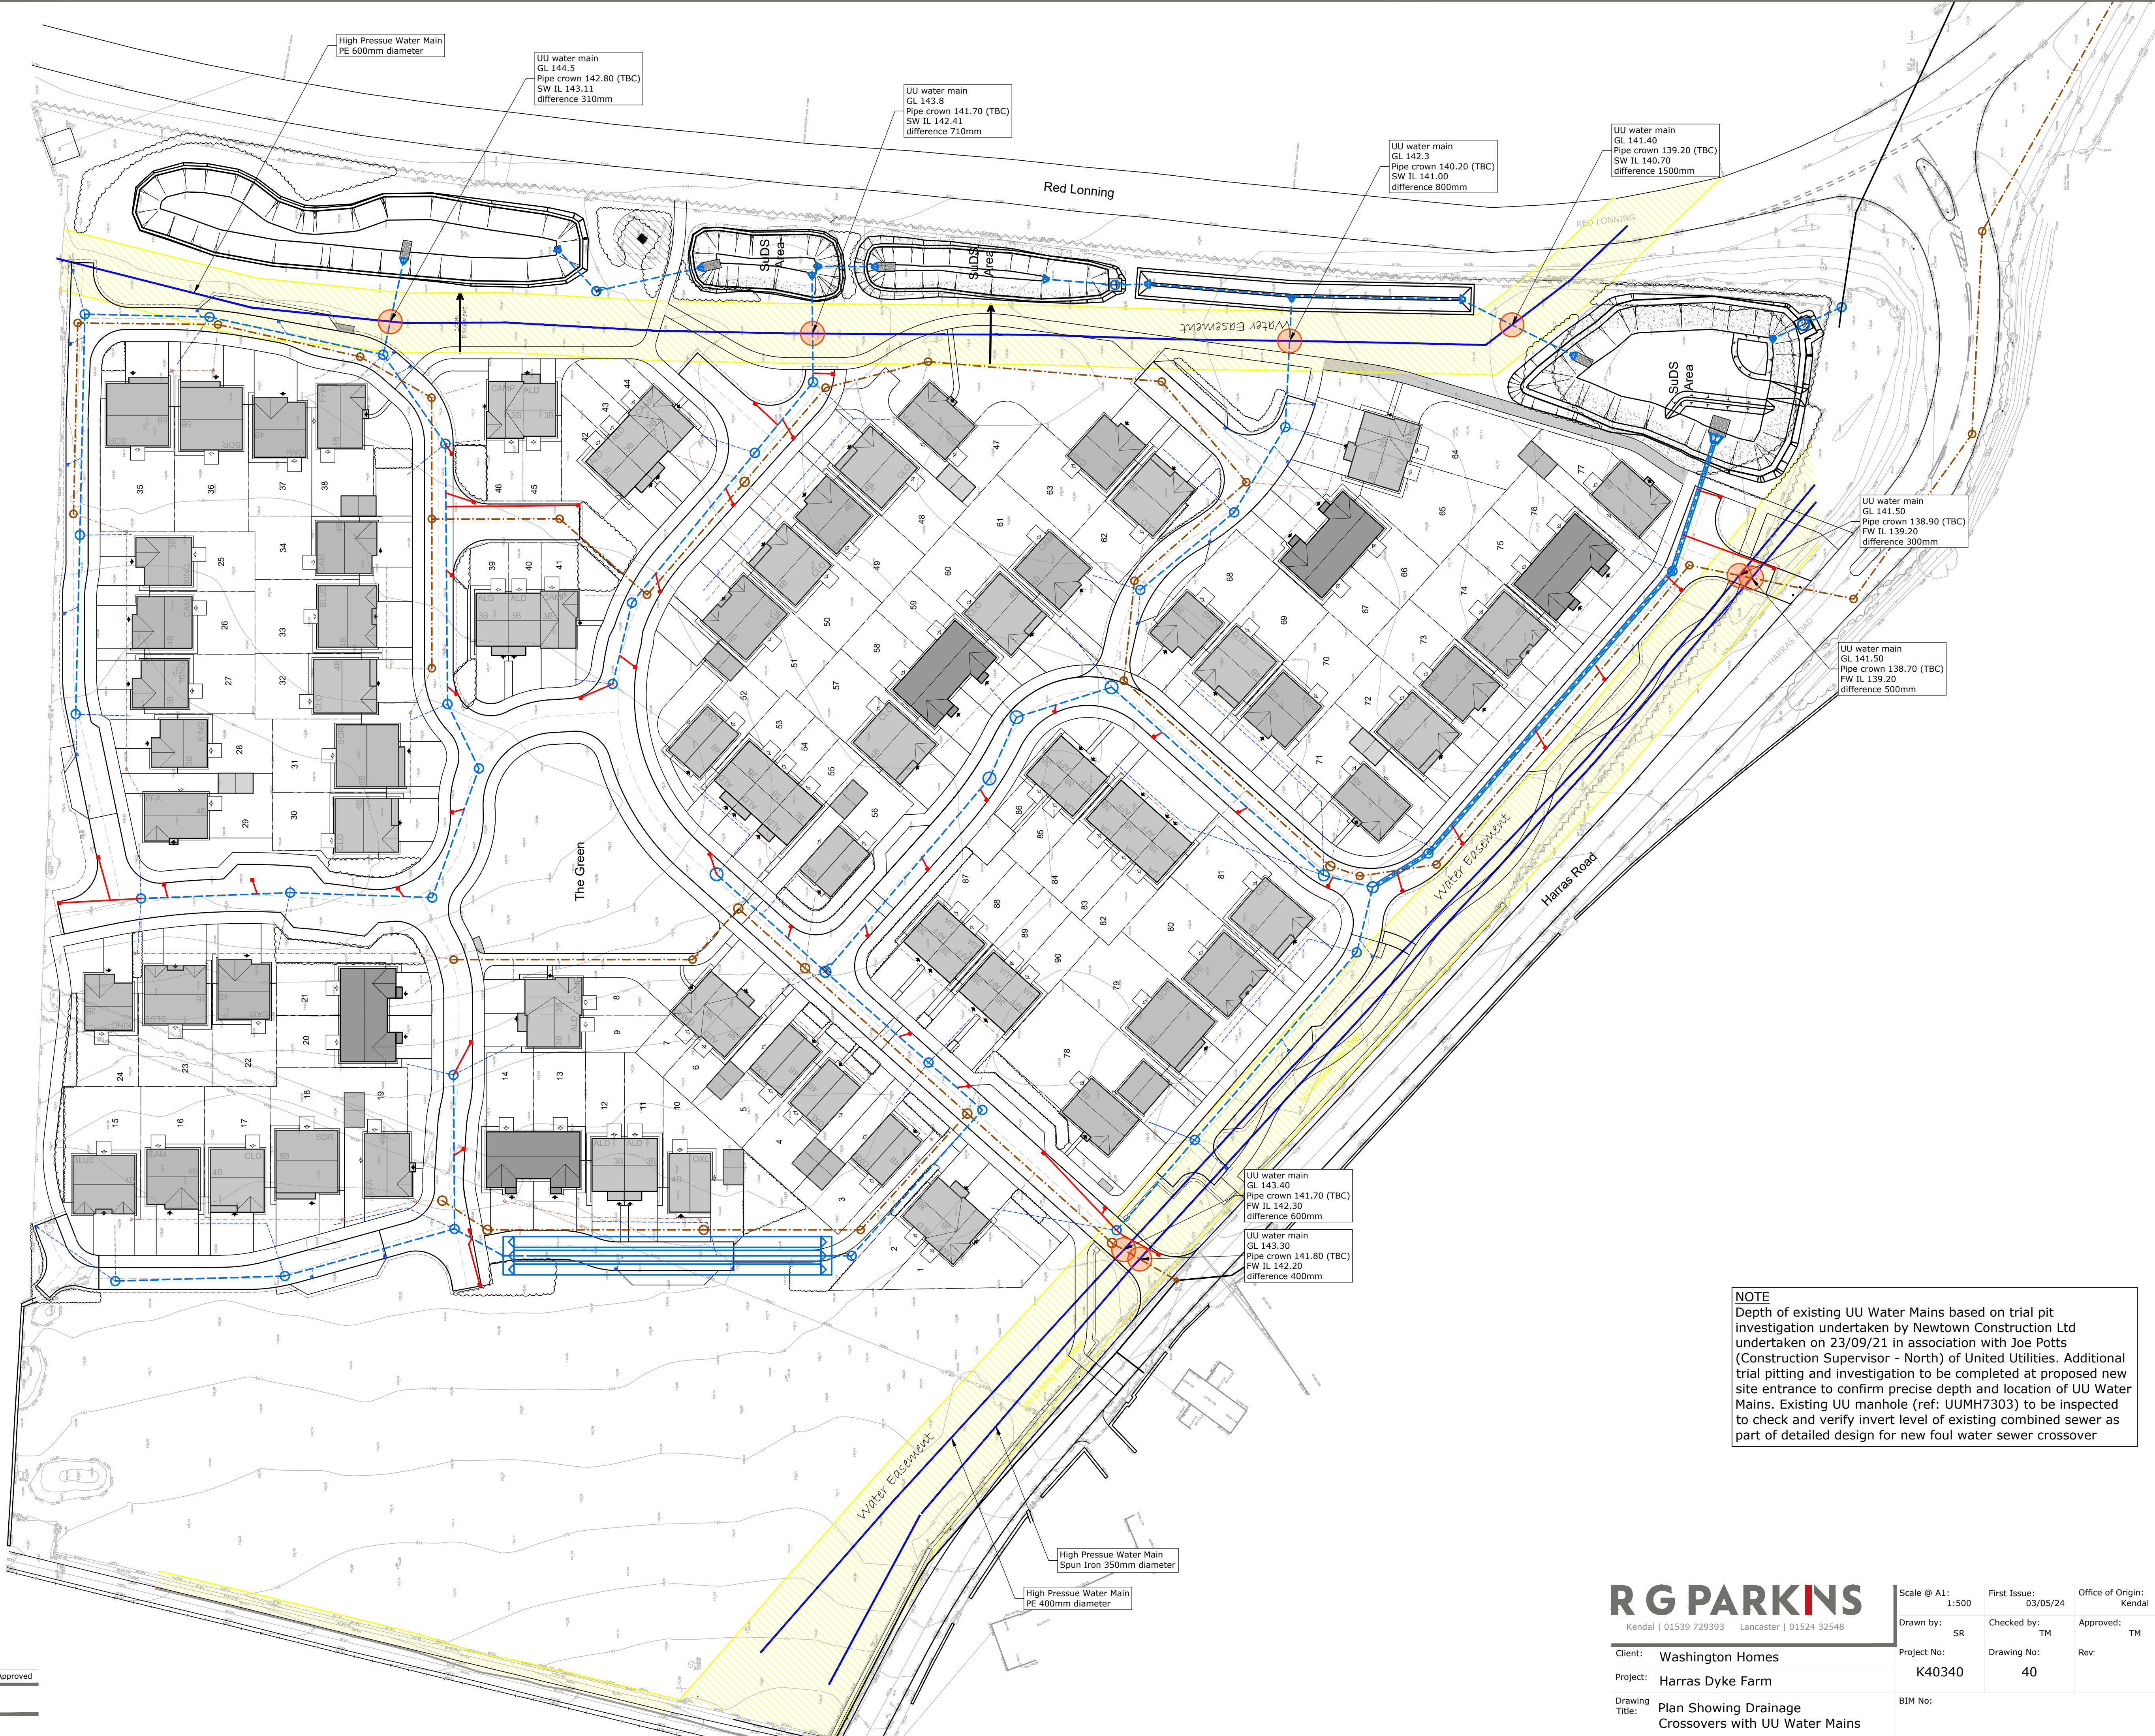

NOTE
Depth of existing UU Water Mains based on trial pit investigation undertaken by Newtown Construction Ltd undertaken on 23/09/21 in association with Joe Potts (Construction Supervisor - North) of United Utilities. Additional trial pitting and investigation to be completed at proposed new site entrance to confirm precise depth and location of UU Water Mains. Existing UU manhole (ref: UUMH7303) to be inspected to check and verify invert level of existing combined sewer as part of detailed design for new foul water sewer crossover

R G PARKINS
Kendal | 01539 729393 Lancaster | 01524 32548

Client: **Washington Homes**
Project: **Harras Dyke Farm**
Drawing Title: **Plan Showing Drainage Crossovers with UU Water Mains**

Scale @ A1: 1:500	First Issue: 03/05/24	Office of Origin: Kendal
Drawn by: SR	Checked by: TM	Approved: TM
Project No: K40340	Drawing No: 40	Rev:
BIM No:		

Rev	Description	Date	Revised by	Checked by	Approved
	Planning				
Do not scale from this drawing					