

Ref:- Millom School playing field,
Salthouse Road, Millom.

Pollution prevention measures

The following details are measures to prevent surface water runoff drawing directly into the "Duddon Estuary SSSI & Ramsar, Morecambe Bay SAC, & Morecambe Bay & Duddon Estuary SPA" during excavation + track laying within the school playing field.


Before works commence, a plastic sheet bnd is to be installed on all downsides of field slopes, approx 600mm high, against a post + wire net fence, with the inner edge of the plastic cut into the sod + same compressed back down over it, to prevent dusty water runoff if rain occurs during ground excavation works.

The bnd should enclose the area around the floodgate + exit point of Salthouse pool at the southern corner of the field, from the railway line fence to the embankment between the grass playing field + the school yards/all weather playing field. (Points A to B on site plan)

A shorter section of bnd should be installed between Salthouse Road boundary wall + the raised embankment near the entry point of salthouse pool into the underground culvert. (Points C-D on site plan)

Once the works are complete, + all the turf relaid to the sides of the track, these can be removed.

Whilst works commence, excess rainwater is to be allowed to drain away naturally through the ground.

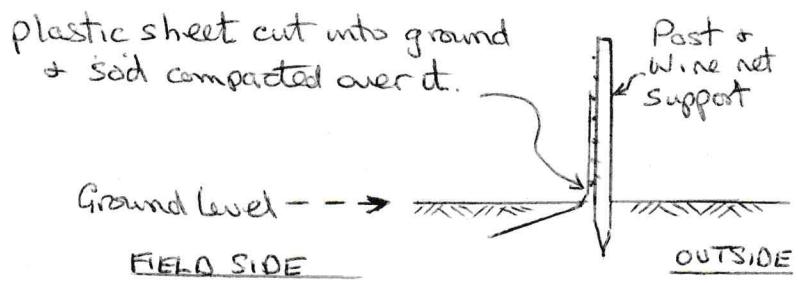

Location shown BLUE on site plan