EXTERNAL	
PROPOSED SCOPE	Deep clean shopfront and make good / repair all areas required. Redecorate and apply new signage as per detailed below
SPECIALIST SIGNAGE CONTRACTOR	Specialist signage contractor to check all heights and sizes on site and all statutory consents are in place prior to manufacturer of proposed signage shown.
FASCIA PANEL	INSTALL FASCIA SIGNAGE
PROJECTING SIGN	INSTALL PROJECTING SIGN
MARKETING POSTER	INSTALL SUSPENDED LIGHTBOX, METAL FRAME TO MATCH RAL7021
OPENING HOURS	INSTALL OPENING HOURS SIGN
CCTV SIGN	INSTALL CCTV SIGN, DOUBLE SIDED IF INSTALLED ON GLASS
COMMUNITY VINYL	INSTALL NEW COMMUNITY VINYL
FROSTED VINYL	INSTALL NEW FROSTED VINYL
GREY WINDOW MANIFESTATION	NA
ATM ADVERT PANEL & SURROUND	INSTALL NEW ATM ADVERT PANEL & SURROUND
EXTERNAL ALARM SOUNDER	INSTALL EXTERNAL ALARM SOUNDER
CCTV	INSTALL CCTV TO COVER ATM. ANY ADDITIONAL CAMERAS REQUIRED TO BE ADVISED BY SPECIALIST DESIGNER / SUPPLIER
SHOP FRONT	EXISTING ALUMINIUM FRAME TO BE CLEANED AND REPAIRED AS REQUIRED THEN DECORATED TO MATCH RAL7021 (DARK GREY)

Elevation to Lowther Street

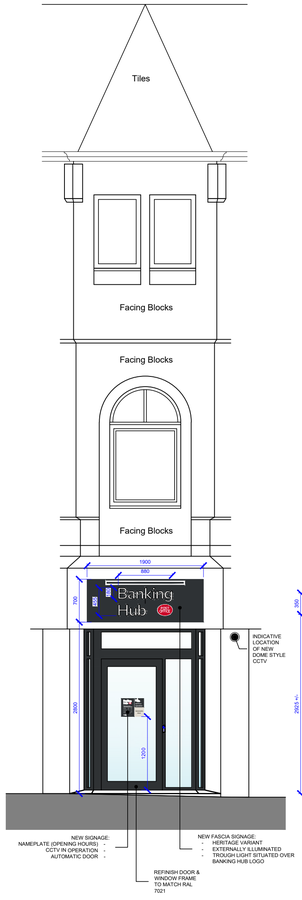

Elevation to Corner

Elevation to King Street

0 0.5 1 1.5 2 2.5m 5m

Notes:

- Do not scale off this drawing
- Drawing to be read in conjunction with all relevant other drawings and related specification documents
- Contractor to check all dimensions / levels on site before construction and advise any discrepancies to L&H Architects
- Dimensions are in millimetres unless otherwise stated
- © This drawing is the copyright of Lewis & Hickey Ltd

CONSTRUCTION (DESIGN MANAGEMENT) REGULATIONS 2015

- This drawing is to be read in conjunction with L&H Architect's corresponding Design Risk Assessments
- All works to be carried out in accordance with the Construction Phase plan prepared by the Principle Contractor

KEY

REMOVALS

DOWNTAKINGS / REMOVALS

NOTE:
All dimensions must be checked on site prior to commencement of works or ordering of third party equipment.

rev	date	description	drawn	checked
P03	25/05/26	Glazing altered to Trespa Meteon at ATM	CL	--
P02	30/04/26	Stage 4 Issue	AC	WL
P01	25/03/26	Initial Issue	AC	--

L&H Architecture
Edinburgh | Guildford | London | Manchester | Nottingham

client

Cash Access UK

in association with

Banking Hub POST OFFICE

project title

Proposed Banking Hub @ WHITEHAVEN

address

22 King Street
Whitehaven
Cumbria
CA28 7JN

description

ELEVATIONS PROPOSED

size	scale	date	drawn by	checked by
A1:L	1:50	25/03/25	AC	WL

status

S3 - Information & Comment

job no. L&H job no: E8016

HUB253-LHA-XX-XX-D-A-0202

revision P03